

1007007000

Dual Display Station

90 TAD



- Desktop master station with full access to all features in the Vingtor-Stentofon AlphaCom exchange
- The station may use up to 90 Direct Access Keys (DAK) on 9 dynamic DAK pages.
- The dialing keys have letters to be used for search facility in the intercom directory and display text editing
- The station has 4 dynamic navigation keys for quick access to system menus and directory entries
- Status information, guidance and menus are shown on a large 4 line graphic display

DESCRIPTION

The Vingtor-Stentofon Master Station with Dual Display is designed for table-top mounting in bank/finance and office environments. The physical size makes it easy to place on desks with limited space. An optional noise cancelling gooseneck microphone module can be mounted in noisy environments. Most functions and codes are the same as for the Vingtor-Stentofon stations in the InterGuard range. The two easy-to-read displays and navigation buttons ensure quick and easy access to the person you want to reach and the functions you want to perform. The direct access keys are easily programmed from the station and can be changed at any time. The display may be edited to show your personal text.

INSTALLATION

The station can be installed in any Vingtor-Stentofon AlphaCom or AlphaCom M system.

WIRING

The Master Stations with Dual Display are installed by connection to a normal line point in the exchange by using a station cable with RJ45 connectors. Note that some RJ45 connectors may be crossconnected internally.

APPLICATION

The station is primary intended to be used as a table top station in bank / finance environment and offices where quick access to several preprogrammed extension numbers and functions is essential. The direct access key display text can be edited.

Created: 01.07.2014, updated: 17.11.2020

page 1/3

www.zenitel.com

info@zenitel.com

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.


ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this leaend; Zenitel – All rights reserved.


SPECIFICATIONS


MECHANICAL

| Order Number | 1007007000 | |
|-------------------------------------|---|-------------|
| Mounting | Table top | |
| Cable Requirements | 2 pair twisted cable 0.5 mmø, 24 AWG | |
| Max line length. Operation voltage. | @ 0.5 mmø, 1400 m / 4600 ft Powered from exchange | |
| Dimensions: (W x H x D) | 72 x 140 x 270 mm. 2.8 x 5.5 x 10.6 inch | |
| Temperature range | 0o - 40oC, 32o - 105oF | |
| Humidity | Non condensing, 10% - 85% RH | |
| Loudspeaker Output | 1W rms, impedance 50 ohm | |
| Loudspeaker Impedance | | |
| Frequency Range | -3dB, 300 - 7000 Hz | |
| Microphone Output Voltage | Voltage 100/300 mV, impedance 1000 ohm | |
| Wall Socket Connector Type | Modular jack, RJ45 | |
| Direct access display | 10 lines, 5-8 characters graphic | |
| Information display | 4 lines, 20 characters graphic | |
| ORDER NUMBER | DESCRIPTION | SHIP WEIGHT |
| 1007007000 | Dual Display Station | 0.40 kg |
| Supplementary equipment: | | |
| 1007007010 | Microphone for Dual Display Station | 0.15 kg |
| EPKAB 98510 | 3 m Station Cable with RJ45 Connector | |
| EPKAB 98515 | 0.5 m Station Cable with RJ 45 Connector | |
| | | |

TECHNICAL DIMENSIONS

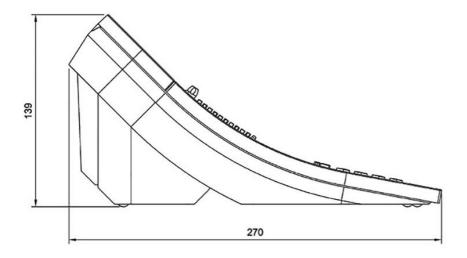



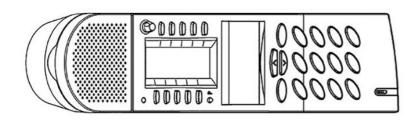

Created: 01.07.2014, updated: 17.11.2020

page 2/3

ACCESSORIES





KB171

MICROPHONE FOR DUAL DISPLAY STATION

Created: 01.07.2014, updated: 17.11.2020

page 3/3