



RE520-RC3 Wireless head with RE520 capsule

- Thread-on microphone head for Electro-Voice and other brand's wireless handheld transmitters
- Premium condenser element delivers a highly-detailed, full, and vivid sound
- Supercardioid polar pattern provides excellent acoustic isolation and feedback control
- Multi-stage pop filter minimizes breath blasts and plosives
- Selectable high-pass filter reduces undesirable low frequency content when engaged



The RE520-RC3 is a premium-grade, high-performance, condenser supercardioid thread-on vocal microphone head for wireless handheld transmitters. Designed to reveal the exceptional detail and vivid clarity synonymous with condenser elements, it elegantly delivers the lyrical finesse required for expressive vocal performances, while controlling off-axis sound from near-by sources.

This microphone head electrically and mechanically adapts to Electro-Voice (and many other brands) wireless handheld transmitters that use the common 3-contact rings, 1.25" diameter by 28-thread pitch coupling convention. The floating captured ID collar will spin freely until screwing the head on tightly. It will remain locked in place when fully tightened. This allows the desired orientation of the branding to the transmitter.

The sonic signature is detailed, full and vivid, with a warm and clear low end, natural and present midrange, and an open, crisp and detailed high end. The supercardioid pattern provides excellent acoustic isolation. Maximum feedback rejection occurs when a stage monitor position is at either 225° or 125° off-axis to the element. This pattern also allows for a cleaner mix due to its rejection of off-axis sound.

The multi-stage pop filter consists of two layers of dense foam separated by air, which attenuates wind velocity caused by breath and windblasts. The high-pass filter has two positions (see drawing). The flat position delivers the full frequency band pass of the capsule. The high-pass position attenuates frequencies below 150 Hz. The internal shock mount isolates the microphone element from vibration and guards against handling noise.


Technical specifications

Element type:	Self-biased condenser
Frequency response:	40 Hz-20 kHz (see chart)
Polar pattern:	Supercardioid
Sensitivity, open circuit voltage @ 1 kHz:	5.6 mV/Pascal (-45 dBV/Pa)
Clipping (max SPL):	139 dB SPL (1% THD)
Self noise:	22 dB SPL "A" weighed (0 dB=20 µPa)
Dynamic range:	117 dB
Signal-to-Noise ratio:	72 dB


2 | RE520-RC3 Wireless head with RE520 capsule

Output impedance:	1000 ohms
Power requirements:	4-8 VDC phantom power
Polarity:	Positive pressure on diaphragm produces positive voltage at center contact relative to ground contact
Electrical contact:	3-Ring/3-Pin
Threaded coupling:	1.25" diameter 28 UN-2A thread pitch
Finish:	Black polyurethane paint
Materials:	Aluminum, steel, steel wire grille screen
Dimensions, length: diameter:	3.36 in. (85.3 mm) 1.95 in. (49.6 mm)
Net weight:	4.6 oz (130 g)
Shipping weight:	6.7 oz (190 g)


Frequency response: High-Pass

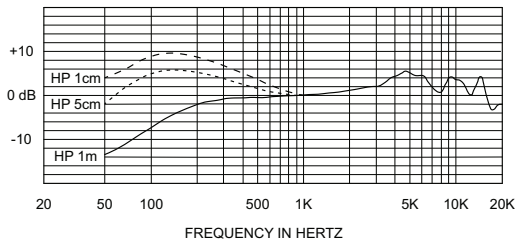

Flat

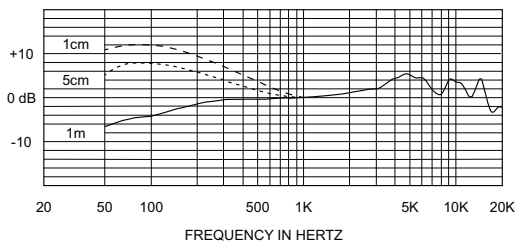

Dimensions:




Notice!

It is important to prevent under-driving or over-driving the handheld transmitter input stage. Pay special attention when matching the transmitter input sensitivity to this microphone head.




Adjust the transmitter sensitivity to a level where the audio path meter on its companion receiver shows 75%-95% full on high-emphasis vocal peaks for optimal signal strength and quality.

Polar response:

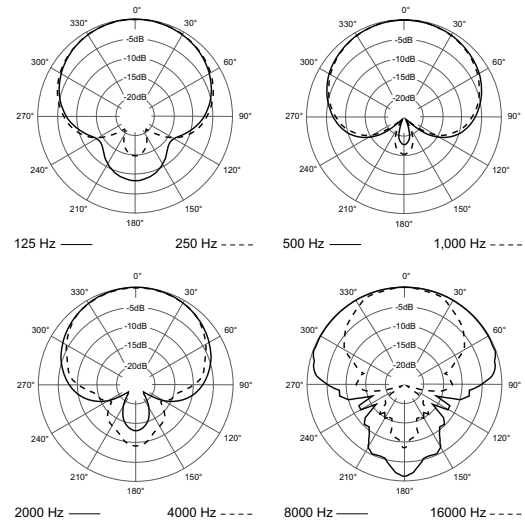


Bottom view:



- A Audio out
- B DC power input
- C Ground
- D Slip ring connector

High-Pass filter:



- A High-Pass
- B Flat

Replacement parts	Description
RE520GRILLE	Replacement grille, black

Parts included

Quantity	Component
1	Thread-on microphone head
1	Engineering datasheet
1	Warranty and product documentation information card

Ordering information

RE520-RC3 Wireless head with RE520 capsule

Condenser supercardioid vocal microphone head, black

Order number **RE520-RC3**

Accessories

379-1 379-1 WINDSCREEN, BLACK, PACKAGED

Foam windscreen/pop filter, black

Order number **379-1**

Represented by:

Germany:
Bosch Sicherheitssysteme GmbH
Robert-Bosch-Ring 5
85630 Grasbrunn
Germany

Bosch Security Systems, Inc.
12000 Portland Avenue South
Burnsville MN 55337
USA

www.electrovoice.com