

## Desiccant Dryers

### MWE SERIES

#### FEATURES AND BENEFITS

- Internal-heat regeneration system
- Economical regeneration process
- Minimal regeneration air usage
- Long life of the heater elements and desiccant
- Energy saving with dew point control (optional)
- Modern touch screen control interface
- Mechanically stable, low-dusting desiccant
- 16 bar.g (Optional)




Technical Data	MWE 74 - 308	MWE 385 - 1284
Inlet / Outlet	Inlet rear bottom / Outlet rear top	
Desiccant	Activated Alumina	
IP class	(Control box: IP 54)	
Compressed air connection: Threaded	●	○
Welded with DIN flanges	○	●
Pressure dew point control	○	
Safety relief valves	○	
Control: PLC	●	
Energy management	○	
Noise level	< 71 dB(A) LEQ	
Lockable main switch	●	
Different voltage	○	
Deltech® pre- and after-filter	○	
General Data		
Medium	Compressed air	
Drying system	Twin-tower adsorption	
Regeneration system	Internal-heat regeneration system, thermostatic control	
Housing material	PED 97/23/EC. Module H	
Colour	RAL 9001 (white), special finishing optional	
Installation	Indoors	
Mounting	Freestanding; anchor holes provided	

● standard ○ On request – not applicable

Model	FlowRate*	Connection	Dimensions			Weight	Operation	Control	Power Consumption (kW)		Pre-filter	After-filter
			A	B	C				Average	Installed		
	m <sup>3</sup> /h			mm		kg	V/Ph/Hz					
MWE 74	245	1"	704	596	2,147	290	400/3/50	24VDC	1.7	3.6	NG-08-HF	DF08-HTA
MWE 120	400	1 1/2"	873	652	2,230	435			2.7	5.4	NG-12-HF	DF12-HTA
MWE 196	653	1 1/2"	909	702	2,570	670			3.6	7.2	NG-12-HF	DF12-HTA
MWE 236	785	DN80	1,054	721	2,789	740			4.5	9.0	HF5-52	HF6-52HTA
MWE 308	1,026	DN80	1,089	767	2,760	950			5.4	10.8	HF5-56	HF6-56HTA
MWE 385	1,282	DN80	1,404	877	3,021	1,450			7.2	14.4	HF5-56	HF6-56HTA
MWE 575	1,916	DN80	1,154	916	3,021	1,670			10.8	21.6	HF5-56	HF6-56HTA
MWE 675	2,250	DN100	1,554	1,021	3,031	1,900			12.6	25.2	HF5-60	HF6-60HTA
MWE 801	2,670	DN100	1,759	1,011	3,165	2,300			14.4	28.8	HF5-60	HF6-60HTA
MWE 1077	3,590	DN150	1,834	1,171	3,174	3,000			18.9	37.8	HF5-64	HF6-64HTA
MWE 1284	4,280	DN150	1,933	1,217	3,174	3,300			22.5	45.0	HF5-68	HF6-68HTA

\* ISO 7183, based on the intake volume of the compressor at +20°C and 1 bar (a), operating pressure 7 bar (g), inlet temperature +35°C, ambient or cooling water temperature +25°C, pressure dew point -40°C. Technical data and specifications are subject to change without prior notice.

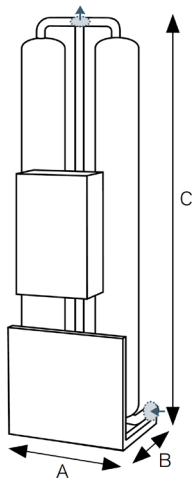

Design Data*	Min.	Nominal	Max.
Operating pressure	5 bar (g)	7 bar (g)	10 bar (g) (16 barg optional)
Inlet temperature	+5°C	+35°C	+50°C
Pressure dew point		-40°C	
Ambient temperature	+5°C	-	+50°C
Relative humidity inlet air		100%	

Max. operating pressure of 16 bar (g) available on request.

\* The following correction factors need to be used to select the correct unit for other operating conditions.

Correction factors for different operating pressures in bar (g) (F <sub>1</sub> )												
bar (g)	5	6	7	8	9	10	11	12	13	14	15	16
MWE 74 - 1284	0.75	0.88	1.00	1.13	1.25	1.38	For a selection consult your distributor					

Correction factors for different inlet temperatures in °C (F <sub>2</sub> )							
°C	+5	+30	+35	+40	+45	+50	
MWE 74 - 1284	1.00	1.00	1.00	0.77	0.59	0.46	

Selection example		Calculation	
Compressor capacity (V <sub>1</sub> )	900 m <sup>3</sup> /h	$V_2 = \frac{V_1}{F_1 \cdot F_2} = \frac{900}{1.38 \cdot 0.77} = 847 \text{ m}^3/\text{h}$	Selection: MWE 308
Operating pressure (F <sub>1</sub> )	10 bar (g)		
Inlet temperature (F <sub>2</sub> )	+40 °C		
V <sub>2</sub>	Required dryer capacity		

# SPXFLOW



SPX Flow Technology Germany GmbH  
 Konrad-Zuse-Straße 25 | D-47445 Moers  
 Tel.: +49 (0) 28 41 / 8 19-0 | Fax: +49 (0) 28 41 / 8 19 83  
 E-Mail: info@spx-deltech.de  
 www.spx-deltech.de | www.spxflow.com

SPX FLOW, Inc. reserves the right to incorporate our latest design and material changes without notice or obligation.

Design features, materials of construction and dimensional data, as described in this bulletin, are provided for your information only and should not be relied upon unless confirmed in writing. Please contact your local sales representative for product availability in your region. For more information visit [www.spxflow.com](http://www.spxflow.com).

The green 'S' and 'X' are trademarks of SPX FLOW, Inc.