## Fryer Oil Disposal System

**ODS 100** 



ODS 100 fryer oil disposal system

The unappealing job of draining, transporting and disposing of spent frying oil becomes much easier with the Henny Penny ODS 100.


First, drain spent oil into the fryer filter pan. Then attach ODS 100 hose to the filter rinse hose connection and switch on the fryer pump. Fryer pumps oil directly into the 100 lb capacity reservoir. The load is easily transported on two large 7 in (178 mm) rear wheels.

A one-piece discharge pipe swings out to either side for convenient disposal. The powerful manual pump is located at the ideal height, making pump out fast and easy.

The ODS-100 can be used with Henny Penny pressure fryers and open fryers.

## **Standard Features**

- Large 100 lb (45 kg) capacity handles most fryer vats in one load
- Pump-out hose with male and female quick-connect fittings—simply reverse hose to service open fryers and pressure fryers
- Powerful manual pump empties 100 lb (45 kg) of oil in less than two minutes
- Tall reservoir design offers small footprint and stability during transport
- Check valve insures consistent pump priming
- · One-piece discharge pipe swings at height to clear most containers
- Easy-grip retainer screw locks swing pipe into any convenient position
- Hinged reservoir access lid latches and seals to prevent spills
- Large 7 in (178 mm) rear wheels for smooth, stable transport.

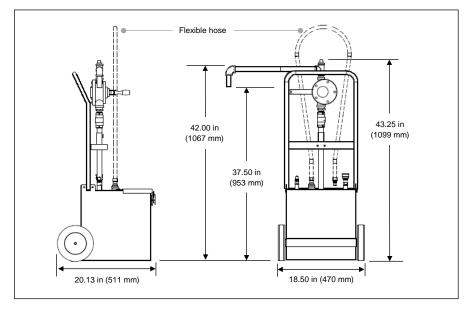

**Dimensions** 

Width 18.50 in (470 mm) Depth 20.13 in (511 mm) 43.25 in (1099 mm) Height 37.50 in (953 mm) Height to discharge Height top of swing arm 42.00 in (1067 mm) Crated dimensions Contact Henny Penny

**Crated weight** 66 lb (30 kg) Oil capacity 100 lb (45 kg)

Continuing product improvement may subject specifications to change without notice.

☐ APPROVED ☐ APPROVED AS NOTED ☐ RESUBMIT AUTHORIZED SIGNATURE DATE

**Henny Penny Corporation** PO Box 60 Eaton OH 45320 USA

+1 937 456.8400 800 417.8417 +1 937 456.8434 Fax 800 417.8434 Fax +1 800 417.8405 Technical Support

