Pneumatic-hydraulic blind rivet setting tools





Sets blind rivets up to 6.4 mm Ø all materials (max. mandrel dia. 4.5 mm)

Technical data

Weight: 1.9 kg 5-7 bar Operating air pressure:


Air hose connection: 6 mm Ø (1/4")

Air consumption: approx. 4.8 ltr. per rivet 14,000 N at 5 bar Traction power:

Stroke: 25 mm

Equipment

Nosepieces: 17/36, 17/40 and 17/45, maintenance wrench SW12/14, SW14/17, 1 hydraulic oil bottle 100 ml, 1 oil refill can, Operating instructions with spare parts list

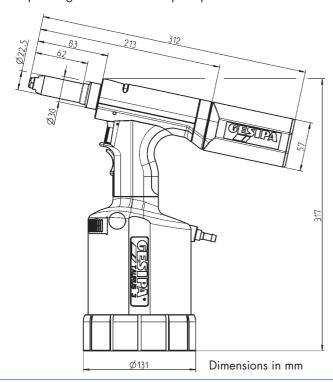



Working range

Sets blind rivets up to 6.4 mm \varnothing all materials and up to 8 mm Ø alu (max. mandrel dia. 4.5 mm)

Technical data

2.0 kg Weight: 5-7 bar Operating air pressure:

Air hose connection: 6 mm Ø (1/4")

Air consumption: approx. 4.8 ltr. per rivet 20,000 N at 5 bar Traction power:

Stroke: 19 mm

Equipment

Nosepieces: 17/36, 17/40 and 17/45, maintenance wrench SW12/14, SW14/17, 1 hydraulic oil bottle 100 ml, 1 oil refill can, Operating instructions with spare parts list

