


the specialist for perfect hardwood finishes

As an abrasive product specially designed for hardwood belt sanding, 1920 siawood achieves high stock removal rates and fine surface finishes and excels across the full range of grits in calibration sanding, intermediate sanding, fine sanding or flush sanding applications.

Advantages

- High removal rate and fine surface quality on hardwood across the entire grit range
- Perfect surface finishes thanks to TopTec
- Dust-free process: antistatic construction gives low dust formation on belt, workpiece and machinery
- High surface quality when sanding hardwood
- High surface quality using fine grit sizes

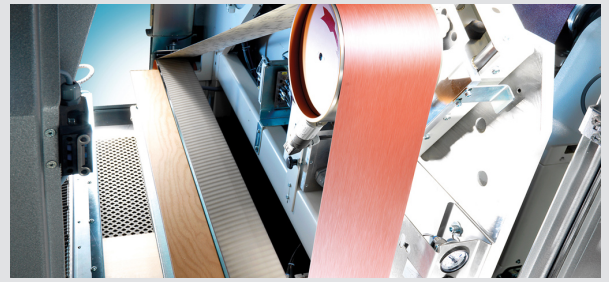

Applications


- Intermediate sanding of surfaces
- Fine sanding of surfaces
- Intermediate sanding of polyester varnishes
- Calibrating surfaces
- Flush sanding of edges, edge bands and protrusions

Product profile

Grit type: Semi-friable aluminium oxide
 Backing: f-wt paper
 Coating: Closed
 bonding: resin over resin
 Equipment: TopTec

Properties


The following properties refer to the materials used in the main application:

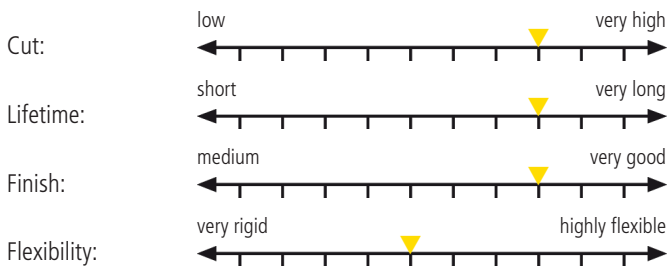

Materials

Hard wood; Resinous wood; UV lacquer; Mineral material; Polyester lacquer; PU lacquer

Application

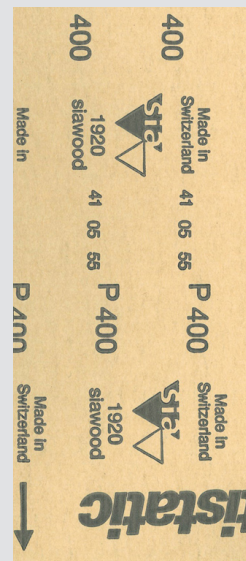

16				
20				
24				
30				
36				
40				
50				
60	■			
80	■			
100	■			
120	■			
150	■			
180	■			
220	■			
240	■	■		
280	■			
320	■			
360				
400	■			
500				
600				
800				
1000				
1200				
1500				
2000				
2500				
3000				
4000				

plain
 siastat
 siasoft
 SKF