
RUNPOLIFTER 4500 - L1150

Drum lifter up to 4500 kg - drum Ø 1600 mm - wide 800 mm

Item no: 10162



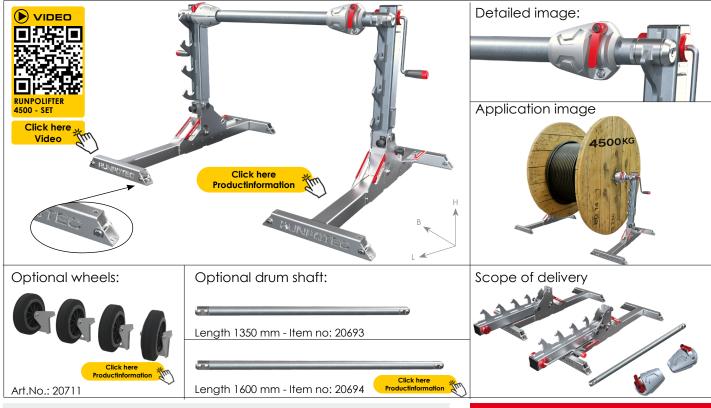

DATA	
ITEM NO	10162
TOTAL WEIGHT	58.60 kg
DIMENSIONS	when opened: L 1000 x W 400 x H 750 mm when closed: L 1220 x W 400 x H 245 mm
LENGTH	Drum shaft 1150 mm
MAX. DRUM WEIGHT	Drums up to max. 4500 kg
EAN-Code	9120045476446

DESCRIPTION

The RUNPOLIFTER 4500 is a foldable cable drum lifter that is capable of lifting drums with a maximum diameter of 1600 mm and a maximum weight of 4500 kg. Its lightweight construction (22 kg per lifting support) means it can be easily transported, yet it still maintains excellent standing properties on a wide variety of floor coverings. The two lifting supports are equipped with a 2-stage gearbox. The fast gear is used for the idle stroke and the working gear is used for the load stroke. Switching between the two gears can be controlled by pulling out the crank. When using the RUNPOLIFTER 4500, it is not necessary to pin the raised load because the gearbox is equipped with a self-locking spindle.

The included drum shaft features two plain bearings that enable the respective drum to be rolled comfortably without any trouble. The 1150 mm drum shaft is included. The following lengths are also available: 1350 mm or 1600 mm. The two included centring cones each have a quick-release fastener that enable the drum to be fixed quickly and centrally in place. Drums with a max, inner diameter of Ø 115 mm can be secured here.

OPTIMUM AREA OF APPLICATION: for lifting and then rolling cable drums with a diameter of up to 1600 mm, a wide of 800 mm and a max. weight of 4500 kg **Application video:** a short, very informative application video can be viewed by scanning the QR code or on www.runpotec.com.

Scope of delivery: $2 \times 10^{-2} \times 1$

ADVANTAGES

- √ Foldable
- ✓ Compact and easy to transport
- Only 22 kg per support plus 11 kg for the shaft High weigth saving
- Drum shaft Ø 54 mm with integrated heavy duty plain bearing - Stainless steel security mount
- ✓ Lifts drums up to max. 4500 kg and max. Ø 1600 mm
- ✓ No additional pinning of the lifted load necessary

