

Electronic Continuously Variable Triac Controller

The Trilink-2t enables continuously variable speed control for single-phase fans based on a 0-10V input signal. The Trilink-2t can also be configured to control heat lamps or lighting. The maximum output current is 12.5 Amps.




Benefits:

- Low investment
- Smooth fan operation
- Easy to install
- Easy to operate
- Applicable for both new and existing ventilation systems

Features:

- Continuously variable speed control for fans up to a total of 12.5 Amps
- · Adjustable minimum output voltage
- 12V dc output for direct potentiometer control (to drive the controller directly)
- 10 Amps relay contact for controlling fans with 3-wire connection for smoother fan operation.
- Built-in voltage and current protection
- 100% override switch

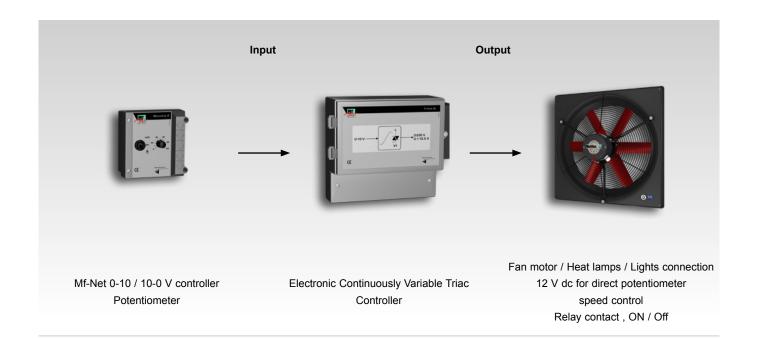





Specifications Trilink-2T

Definition	Min.	Туре	Max.	Notes
Controller type				Electronic Continuous Triac
Mains supply	207 V	230 V	253 V	1~
Mains frequency	50 Hz		60 Hz	
Fuse F1 (fan output)		16 A		F, Size 5 x 20 mm
Input speed control	0 V 10 V		10 V 0 V	Adjustable with DIP switch
Input impedance		25 kΩ		
Input accuracy		±1 %		
Fan output voltage	0 V		Vin-5 V	
Fan output current	0.5 A		12,5 A	
Output Power			2875 VA	
Output relay contact			10 A	For 3-wire fan connection
Optional potentiometer value	1 kΩ	10 kΩ	50 kΩ	For manual control
Housing				IP54 Plastic housing
Weight (unpacked)		2 kg		
Dimensions (W x H x D)		267 x 225 x 104 mm		
Operational temperature	0		40 °C	
Storage temperature	-15 °C		50 °C	
Ambient relative humidity			95 %	

Control diagram 0-10 V





Why choose Vostermans Ventilation:

LOYAL TO YOU

We care for your specific needs based on our long expertise. In close cooperation with you we secure your business outcomes.

RELIABLE

Since our foundation in the Netherlands in 1952, we maintain our reputation as reliable partner. Our carefully selected global network of independent distributors strive to deliver you dedicated service and expertise.

FUTURE PROOF

Our future proof approach, which combines energy efficiency solutions with robust quality and rigorous testing, is based on a genuine commitment to serve as a trusted partner.

Vostermans Ventilation is a global developer and manufacturer of sustainable axial fans for the agricultural and industrial market. Sustainability is key for Vostermans. Their premium brandlines Multifan and EMI are showcasing the drive for advanced energy efficient fans. The company applies continuous innovation and research in their own motor production facility and in house state of the art R&D department. Vostermans Ventilation, part of Vostermans Companies founded in 1952, is based in Venlo, the Netherlands and operates in USA, China and Malaysia.



YOUR SPECIALIST IN AIR

All rights reserved. Vostermans Companies is not responsible for inaccurate or incomplete data. In case of any questions and / or remarks please contact ventilation@vostermans.com. Subject to alterations 01/2020

Venlo - The Netherlands Tel. +31 (0)77 389 32 32 ventilation@vostermans.com Bloomington, IL- USA Tel. +1 309 827-9798 ventilation@vostermansusa.com Tmn Klang Jaya - Malaysia Tel. +60 (0)3 3324 3638 ventilation@vostermansasia.com Shanghai - China Tel. +86 21 5290 2889/2899 ventilation@vostermanschina.com