

## MAIN FEATURES

- 90 – 264 V<sub>AC</sub> Universal input voltage range
- 200 W rated power
- 2 x 4 x 1.48" compact form factor (> 16.9 W/in<sup>3</sup>)
- High efficiency (up to 93.5%)
- No-load low power consumption (<0.3 W)
- 12, 24, and 48V<sub>DC</sub> standard output variants
- Active PFC, EN61000-3-2 compliant
- Low earth leakage current (<300 μA)
- Over temperature protection, auto-recovery
- Output over voltage latch off protection
- Over load and short circuit hiccup protections
- 12 V Auxiliary, 0.5 A output
- Metallic protecting cage available option
- IEC safety installation Class I and Class II variants
- Certified according to the IEC/EN/UL 60950-1 and IEC/EN/UL 62368-1
- RoHS-3 compliant (EU directive 2015/863)
- 3000 m altitude operation
- 5 years warranty (\*)



(\*) Warranty period relevant the "-PC" variants when operated below 190 V<sub>AC</sub>, at >75 % load natural convection, is Three (3) years

## DESCRIPTION

The DDP200 is a series of IT/Industrial grade power supplies designed to offer the high-power density and high efficiency that space constrained and power demanding systems need. Available in 12, 24 and 48 V<sub>DC</sub> outputs, this series of high-performance AC-DC power supplies provides up to 200 W steady output power with moving air, or from 160 W upwards with convection cooling over the full 90 – 264 V<sub>AC</sub> universal input voltage range, all in a compact 2.00 x 4.00 x 1.44" open frame form factor. It is also available in a 2.44 x 4.61 x 1.57" enclosed package which provides operator protection during system servicing and enhanced thermal performance. With 93.5% efficiency and extremely low 0.3 W power consumption at no-load, the DDP200 facilitates thermal management and equipment design, including compatibility with the latest environmental legislations. The DDP200 series meets the latest IEC/EN/UL 60950-1 and IEC/EN/UL 62368-1 safety standards, including the internationally recognized EMC standard EN55032 Class B specifications for conducted noise emissions, and EN55024 / EN 61000-6-2 for EMC immunity, making the series suitable for use in a wide range of IT/Industrial applications worldwide. The series comes configured in the IEC protective Class I or Class II variants as a standard.

## MARKET SEGMENTS AND APPLICATIONS

- Integrated Wireless Backhaul Mobile LTE-A, 5G
- Desktop 3D Scanners / Printers
- LED Signage / Lighting Systems
- Voice and Data Center Solution
- Fiber Optics Telecommunication Systems
- Video/Imaging Systems

## MODEL CODING AND OUTPUT RATINGS

Model and Output Power	Output Nominal Voltage	Package Options
ITE 200W: DDP200	12 V <sub>DC</sub> : -US12	Open Frame: -OF
	24 V <sub>DC</sub> : -US24	
	48 V <sub>DC</sub> : -US48	Protective Cage: -PC



## MODEL CODING AND OUTPUT RATINGS

Model Number	Output Voltage V1 [V]	V1 Output Voltage Accuracy [%]	I1 Output Current Forced air [A]	I1 Output Current <sup>1</sup> Convection [A]	V1 <sup>2</sup> Ripple [mV]	V1 Typical Efficiency [%]	Fan Voltage V2 [V]	I2 <sup>1</sup> Output current forced air [A]	I2 <sup>1</sup> Output current Convection [A]
DDP200-US12-OF	12	±2	16.67	15.00	150	92	12	0.5	0.3
DDP200-US24-OF	24	±2	8.33	7.50	240	93.5	12	0.5	0.3
DDP200-US48-OF	48	±2	4.17	3.75	480	93	12	0.5	0.3
DDP200-US12-PC	12	±2	16.67	16.67	150	92	12	0.5	0.3
DDP200-US24-PC	24	±2	8.33	8.33	240	93.5	12	0.5	0.3
DDP200-US48-PC	48	±2	4.17	4.17	480	93	12	0.5	0.3

<sup>1</sup> The combined output power of V1 and V2 for “-OF” and “-PC” packages, must not exceed 200 W when cooled by 10 CFM air flow, and 180 W when natural convection cooled, up to 40 °C. Above 40 °C output de-rating applies. See de-rating curves below. In any case, the heat sink temperature should not exceed +110 °C at 50 °C ambient temperature.

<sup>2</sup> Peak-to-Peak measured at 20 MHz Bandwidth.

## INPUT SPECIFICATIONS

Specification	Test Conditions / Notes	Min.	Nominal	Max.	Units
AC Input Voltage		90	100-240	264	V <sub>AC</sub>
Input Frequency		47	50/60	63	Hz
Input Current	RMS at 100 V <sub>AC</sub> , maximum load	-	-	2.5	A
Inrush Current (peak)	240 V <sub>AC</sub> , 25 °C ambient, cold start 12, 24, 48 V <sub>DC</sub> , variants	-	-	100	A
Fusing	Time Lag, 5 A, 250 V on both L and N	-	5	-	A
Efficiency	At 230 V <sub>AC</sub> , 100 % rated load	-	-	-	-
	12 V <sub>DC</sub>	-	92	-	%
	24 V <sub>DC</sub>	-	93.5	-	%
	48 V <sub>DC</sub>	-	93	-	%
No-load Power Consumption	At 115-230 V <sub>RMS</sub> , no load	-	-	0.3	W
Power Factor	At full rated load, 115 V <sub>AC</sub> , 60 Hz and 230 V <sub>AC</sub> , 50 Hz input voltages	0.90	-	-	-
Harmonic Current	Complies with EN-61000-3-2, Classes A, D				
Fluctuations and Flicker	Complies with EN-61000-3-3 at nominal voltages and full load				
Earth Leakage Current	Normal conditions, 264 V <sub>AC</sub> , 60 Hz.	-	-	300	μA
	Normal conditions, nominal input voltages and frequencies	-	260	-	μA
Touch Leakage Current “PC” variant	Normal conditions	-	75	100	μA


## OUTPUT SPECIFICATIONS

Specification	Test Conditions / Notes	Min.	Nom.	Max.	Units
<b>V1 Output Voltage</b>	±2% set point accuracy for all voltage variants At 60% load, 25 °C ambient temperature. Output voltage can be manually adjusted through potentiometer in a maximum ±2% of nominal value	-	12 24 48	-	V
<b>V1 Rated Currents</b>	12 V <sub>DC</sub> , 10 CFM forced air cooling 24 V <sub>DC</sub> , 10 CFM forced air cooling 48 V <sub>DC</sub> , 10 CFM forced air cooling See output power de-rating curves below	-	-	16.67 8.33 4.17	A
<b>V2 Output Voltage</b>	All models. ±10% accuracy at 10-100% full load	-	12	-	V
<b>V2 Output Current (I2)</b>	Convection / 10 CFM forced air cooling Natural convection cooling	-	-	0.5 0.3	A
<b>V1 Load Regulation</b>	V <sub>AC</sub> : 90 – 264 V <sub>RMS</sub> 20-100% full load	-	-	±1	%V1
<b>V1 Line Regulation</b>	V <sub>AC</sub> : 90 – 264 V <sub>RMS</sub>	-	-	±0.5	%V1
<b>Transient Response (V1 Voltage Deviation)</b>	25% load changes at 1 A/μs 12 V <sub>DC</sub> at 2200 μF Load / I <sub>OUT</sub> > 0.5 A 24 V <sub>DC</sub> at 1000 μF Load / I <sub>OUT</sub> > 0.5 A 48 V <sub>DC</sub> at 560 μF Load / I <sub>OUT</sub> > 0.5 A	-	-	±5	%V1
<b>V1 Ripple and Noise</b>	12 V <sub>DC</sub> 24 V <sub>DC</sub> 48 V <sub>DC</sub> Peak-to-peak, 20 MHz BW. 100 nF ceramic and 47 μF aluminium electrolytic caps at the load	-	-	150 240 480	mV
<b>Turn-on Overshoot</b>		-	10	-	%V1
<b>Hold-up Time</b>	At nominal V <sub>IN</sub> , full load, for all models	10	-	-	ms
<b>Minimum Load</b>	All models; V1, V2 and 5 V <sub>SB</sub>	0	-	-	A
<b>Maximum Load Capacitance</b>	At nominal V <sub>IN</sub> , 25 °C ambient, max load 12 V <sub>DC</sub> 24 V <sub>DC</sub> 48 V <sub>DC</sub>	-	-	16400 8570 1270	μF
<b>Temperature Drift</b>		-0.05	-	+0.05	%V1/°C

### Output Power Ratings / De-ratings

#### 10 CFM Forced Air Cooling:

200 W rated power for both "OF" and "PC" over the whole 90 – 264 V<sub>AC</sub> input voltage range

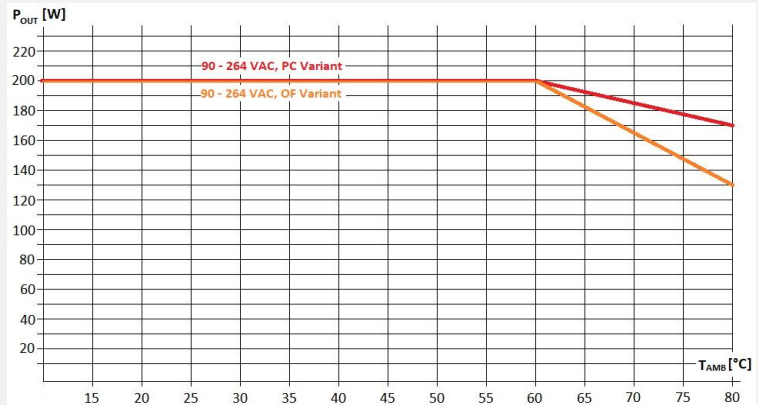


#### Natural Convection Cooling:

160 W rated power for "OF" over 90 – 190 V<sub>AC</sub>

180 W rated power for "OF" over 200 – 264 V<sub>AC</sub>

180 W rated power for "PC" over 90 – 264 V<sub>AC</sub>

200 W rated power for "PC" over 100 – 264 V<sub>AC</sub>

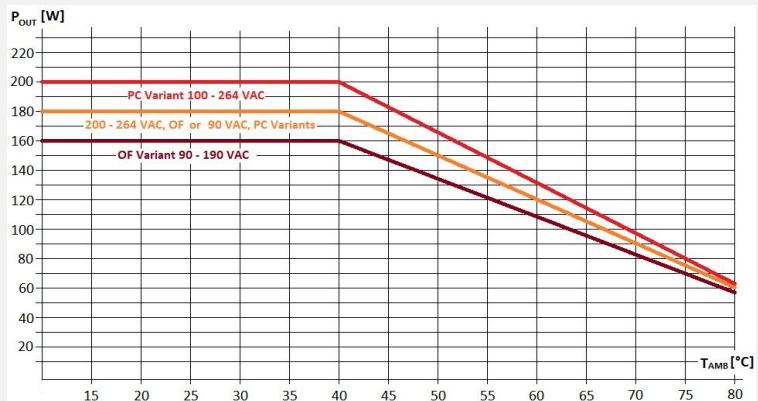

## PROTECTION FEATURES

Specification	Test Conditions / Notes	Min.	Nominal	Max.	Units
<b>Input Fuse</b>	Time Lag, 5 A, 250 V on L1 and L2	-	5	-	A
<b>Over Current</b>	At nominal input voltages V1: Hiccup mode, auto-recovering V2: PTC limiting, auto-recovering	130	150	180	%I <sub>MAX</sub>
<b>Short Circuit</b>	At nominal input voltages V1: Hiccup mode, auto-recovering V2: PTC limiting, auto-recovering	-	-	-	
<b>Over Voltage</b>	12 V <sub>DC</sub> 24 V <sub>DC</sub> 48 V <sub>DC</sub> Unit shut down and latch off	-	16 31 56	-	V
<b>Over Temperature</b>	Hiccup mode, auto-recovering	-	-	-	
<b>Isolation Primary-to- Secondary</b>	Reinforced	4000	-	-	V <sub>AC</sub>
<b>Isolation Input-to-PE</b>	Basic	1500	-	-	V <sub>AC</sub>
<b>Isolation V1-to-V2</b>		100	-	-	V <sub>DC</sub>
<b>Isolation Output-to-PE</b>	Basic	1500	-	-	V <sub>AC</sub>

## ENVIRONMENTAL SPECIFICATIONS

Specification	Test Conditions / Notes	Min	Nominal	Max	Units
<b>Operating Temperature Range</b>	See output power de-rating curves PS starts up at -25 °C	-25	-	70	°C
<b>Storage Temperature Range</b>		-40	-	85	°C
<b>Humidity</b>	RH, Non-condensing Operating Non-operating	-	-	93 95	% %
<b>Operating Altitude</b>		-	-	3000	m
<b>Shock</b>	<b>EN 60068-2-27</b> Operating: Half sine, 30 g, 18 ms, 3 axes, 6x each (3 positive and 3 negative) Non-Operating: Half sine, 50 g, 11 ms, 3 axes, 6x each (3 positive and 3 negative)				
<b>Vibration</b>	<b>EN 60068-2-64</b> Operating: Sine, 10 – 500 Hz, 1 g, 3 axes, 1 oct/min., 60 min Random, 5 – 500 Hz, 0.02 g <sup>2</sup> /Hz, 1 g <sub>RMS</sub> , 3 axes, 30 min Non-Operating: 5 – 500 Hz, 2.46 g <sub>RMS</sub> (0.0122 g <sup>2</sup> /Hz), 3 axes, 30 min				
<b>MTBF</b>	Full Load, 115 V <sub>AC</sub> , 25 °C ambient GB, MIL-HDBK-217F	-	279.000	-	Hours
<b>Useful Life (*)</b>	Low line range, 75% rated load, 40 °C ambient, natural convection	-	4	-	Years
<b>Thermal Considerations</b>	The output power de-rating curves are herein provided. These curves can be used as a guideline to assess the limit in performance of a power supply once installed in a system providing controlled air flow at a certain input voltage and ambient temperature				

(\*) Calculated life time for the PC variants at natural convection, 115 V<sub>AC</sub> input, 40 °C and 75% rated load is 3 years

## ELECTROMAGNETIC COMPATIBILITY (EMC) – EMISSIONS

Phenomenon	Conditions / Notes	Standard	Equipment Performance Class
Conducted (*)	115 V <sub>RMS</sub> , 230 V <sub>RMS</sub> . Maximum load.	EN 55032 (ITE) EN 55011 (IMS)	B
Radiated (*)		EN 55032 (ITE) EN 55011 (IMS)	B
Line Voltage Fluctuation and Flicker	At 2 0%, 50 % and 100 % maximum load. Nominal input voltages.	EN 61000-3-3	
Harmonic Current Emission	At nominal input voltages	EN 61000-3-2	A, D

(\*) Need an external 1mH choke at input for Class II type to pass EN55011 and EN55032 Class B

## ELECTROMAGNETIC COMPATIBILITY EMC) – IMMUNITY

Phenomenon	Conditions / Notes	Standard	Test Level	Performance criteria
<b>Reference standard for IT equipment: EN 55024, EN 61000-6-2</b>				
ESD	15 kV air discharge, 8 kV contact, at any point of the system.	EN 61000-4-2	4	A
Radiated Field	10 V/m, 80-1000 MHz, 1 KHz 80% AM	EN 61000-4-3	3	A
Electric Fast Transient	±2 kV on AC power port for 1 minute; ±1 kV on signal/control lines	EN 61000-4-4	3	A
Surge	± 2 kV line to line; ± 4 kV line to earth; on AC power port	EN 61000-4-5	3	A B
Conducted RF Immunity	10 V <sub>RMS</sub> , 0,15-80 MHz, 1 KHz, 80 % AM 100 – 240 V <sub>AC</sub>	EN 61000-4-6	3	A
Dips and Interruptions	Drop-out to 5 % for 0.5 cycles (10 ms) Dip to 70 % for 25 cycles (500 ms) Interruptions > 95 % for 5 s	EN61000-4-11 EN61000-4-11 EN61000-4-11		A B B


## SAFETY AGENCIES APPROVALS

Certification Body	Safety Standards and file numbers	Category
CSA/UL	CSA C22.2 No. 60950-1, UL 60950-1; UL 63268-1	Audio Video and Information Technology Equipment
IEC IECCE CB Certification	IEC/EN 60950-1, IEC/EN 62368-1	Audio Video and Information Technology Equipment
CE	Directive 2014/35/EU: Electrical Safety: Low Voltage electrical equipment (LVD) Directive 2014/30/EU: Electromagnetic Compatibility (EMC) Directive EU 2015/863 (RoHS 3)	Audio Video and Information Technology Equipment

## OUTLINE DRAWING AND CONNECTIONS – OPEN FRAME (-OF)

Overall dimensions: 50.8 x 101.6 x 37.6 mm (2.00 x 4.00 x 1.48 in)

Weight: 253 g (0.56 lb)

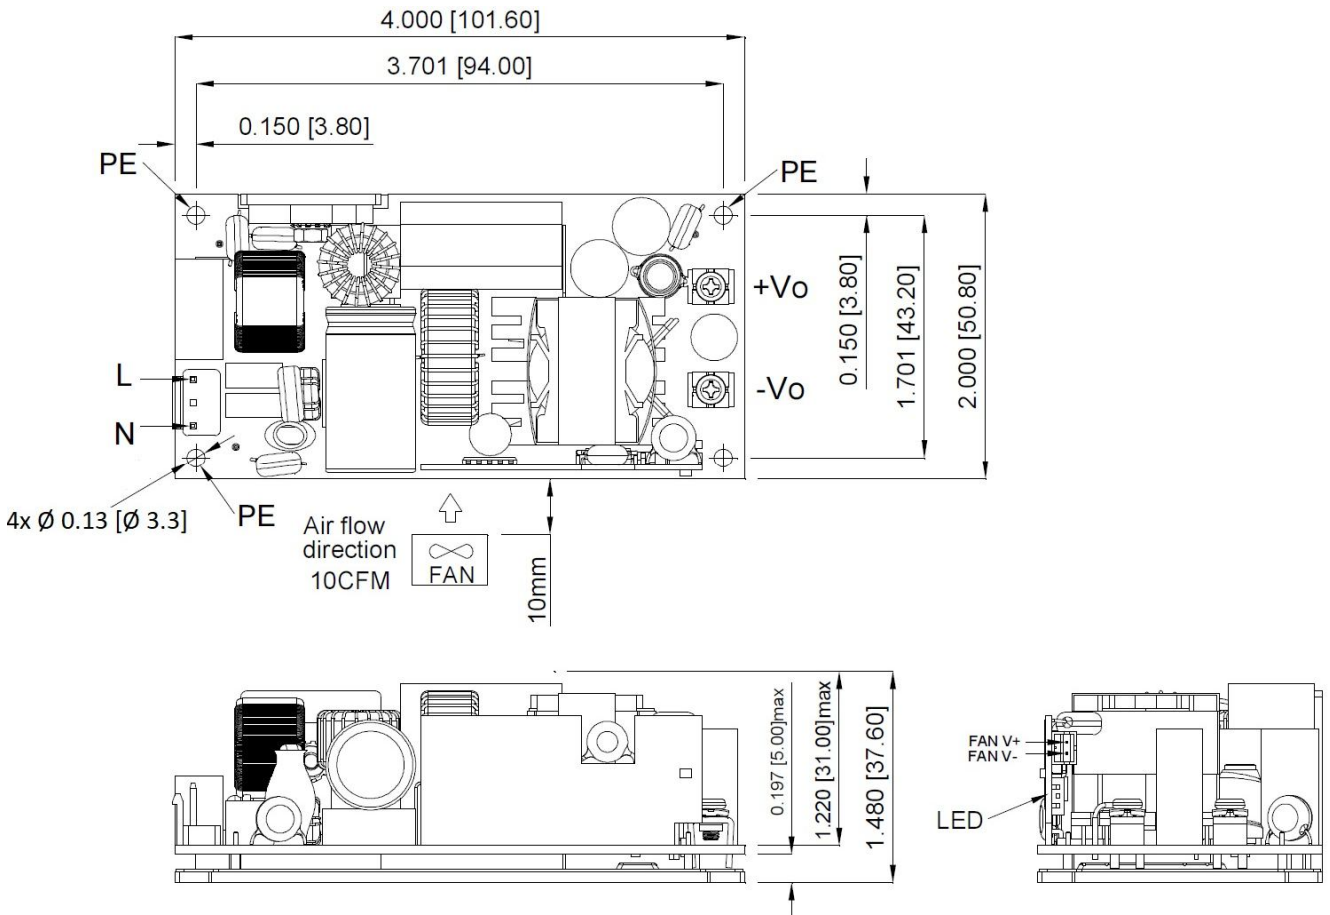

**Input connector (L, N):** TAIWAN KING PIN TERMINAL PVHI series. Mate connector: JST Housing VHR series or equivalent.


**Fan output connector:** TOWNES ENTERPRISE 2001BW series. Mate connector: JST Housing PHR-R5500 series and JST R5503-PT series crimp terminal or equivalent.

**Output connectors (+Vo, -Vo):** M3 screw block, mate with round terminal (outer diameter < 6.75 mm, inner diameter < 3.9 mm).

## OUTLINE DRAWING AND CONNECTIONS – PROTECTIVE COVER (-PC)

Overall dimensions: 62.0 x 117.0 x 40.0 mm (2.44 x 4.61 x 1.57 in)

Weight: 314 g (0.69 lb)

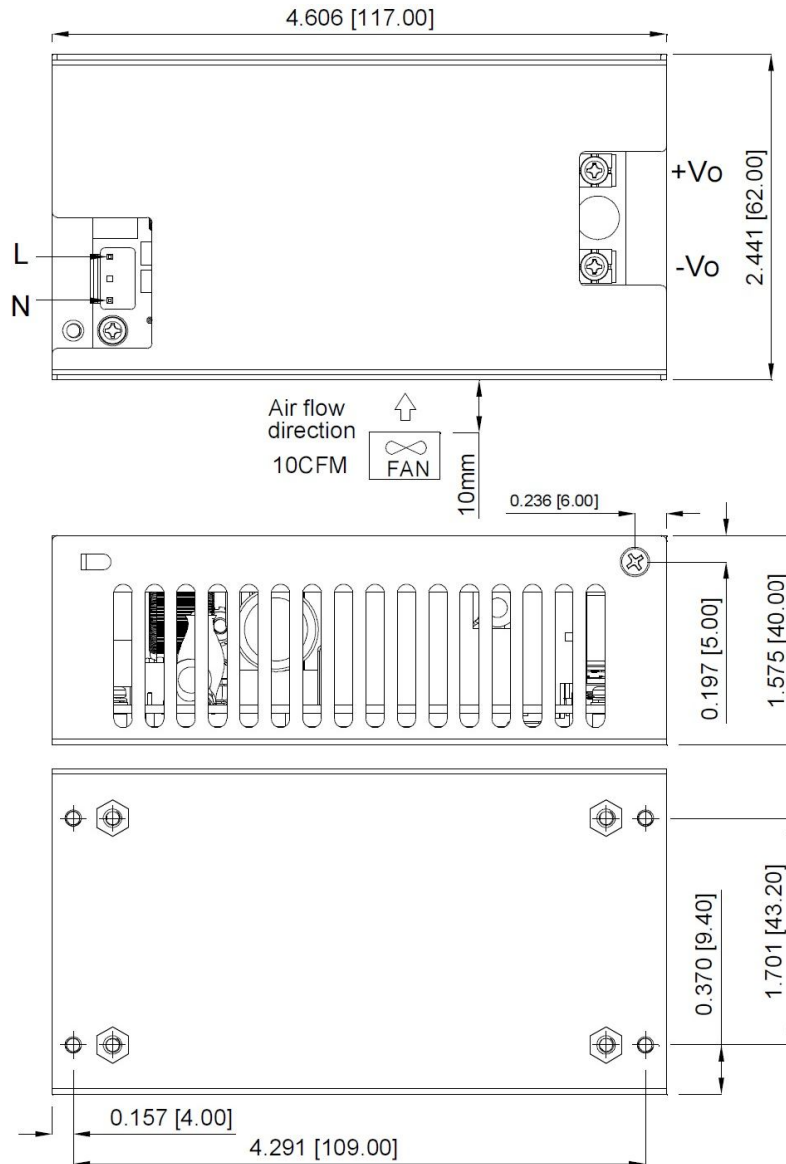

**Input connector (L, N):** TAIWAN KING PIN TERMINAL PVHI series. Mate connector: JST Housing VHR series or equivalent.

**Fan output connector:** TOWNES ENTERPRISE 2001BW series. Mate connector: JST Housing PHR-R5500 series and JST R5503-PT series crimp terminal or equivalent.

**Output connectors (+Vo, -Vo):** M3 screw block, mate with round terminal (outer diameter < 6.75 mm, inner diameter < 3.9 mm).

Specifications appearing in ENEDO's catalogues and brochures as well as any oral statements are not binding. All descriptions, drawings and other particulars (including dimensions, materials and performance data) given by ENEDO are as accurate as possible but, being given for general information, and are not binding on ENEDO. ENEDO makes thus no representation or warranty as to the accuracy of such material. We assume no liability other than as agreed in the terms of the individual contracts and we reserve the right to make technical modifications in the course of our product development. Our product information solely describes our goods and services and is in no way to be construed or interpreted as a quality or condition guarantee. The aforesaid shall not relieve the customer of its obligation to verify the suitability of our Products for the use or application intended by the purchaser. Customers are responsible for their products and applications. ENEDO assumes no liability from the use of its products outside of specifications. No license is granted to any intellectual property rights by this document.