

Pneumatic pumps for the use in short and medium distance dispensing lines or for high pressure lubrication.

Grease

50:1



For **16 kg** – pails

Art.no. **4018**



For **18/25 kg** – pails

Art.no. **4020**



For **50 kg** – drums

Art.no. **4060**




For **180 kg** – drums

Art.no. **4080**

See accessories on pages 32-37!

Art. no.	4018	4020	4060	4080
Compressed air supply	Pressure min 2 - max 8 bar (30 - 120 psi)			
Compression ratio	50:1			
Outlet pressure	400 bar (5800 psi)			
Delivery	2900 g/min			
Connection compressed air	1/4" BSP (F)			
Connection lubricant outlet	1/4" BSP (M)			
Max air consumption with 8 bar pressure	78 l/min			
Length suction tube	335 mm	450 mm	750 mm	950 mm
Diameter suction tube	28 mm			
Dimensions LxWxH (mm)	95x95x690	95x95x780	95x95x1005	95x95x1250
Suitable for pails / drums of	16 kg	18 - 25 kg	50 kg	180 kg
Weight	3.8 kg	4.5 kg	5 kg	5.6 kg

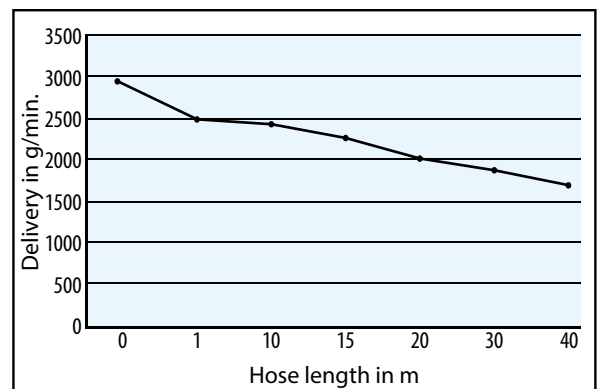

The a. m. performance values are based upon the following test conditions: lithium grease NLGI 0 at 22°C -- Compressed air pressure 8 bar -- free flow outlet 1/2".