

Safety Heads

SRB-7RS™


Pretorqued Safety Head



LPS rupture disk, combined with the SRI-7RS™ or SRB-7RS™ pretorqued safety heads, provides accuracy and reliability.

SRI-7RS™

Pretorqued Safety Head.
US patent 10,704,698 applies.
International patents pending.

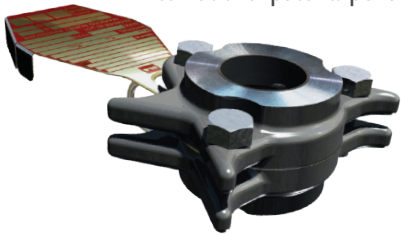

SRB-7FS™

Pretorqued Full-Bolted Safety Head



S90-7R™

Pre-assembled insert Safety Head



Available only for burst pressures higher than 15 psig (1 barg)

TR™ option

For applications using high energy sealing systems, such spiral wound gaskets, the torque resistant safety head option is recommended. Order with TR™ option. Safety head model names become: SRI-7RS-TR; SRB-7RS-TR; and SRB-7FS-TR.

For detailed information about Safety heads available for the LPS, including safety head specifications, please consult catalog 77-4001, Sta-Saf Rupture Disks, available online at www.bsbsystems.com.

LPS™ Low Pressure Reverse Buckling Disk

The LPS rupture disk was developed to provide low burst pressures from 5 psig (0.35 barg) using reverse buckling rupture disk technology. The LPS rupture disk, combined with the SRI-7RS™ or SRB-7RS™ safety heads, provides accuracy and reliability. The LPS uses SAF™ technology enabling very low burst pressures to be achieved with excellent opening characteristics. The Type GLP-S rupture disk is available for installation in the sanitary/aseptic SR-C safety head.

Features

- Solid metal design
- Low burst pressure from 5 psig (0.35 barg)
- Designed for gas, liquid or two phase service
- Fail safe: damage safety ratio < 1
- Designed for non-fragmentation
- Vacuum and back pressure resistant
- Suitable for operating pressures up to 90% of marked burst pressure (ASME), or 95% of minimum burst pressure (CE/PED).
- Reverse buckling disk in sizes: 1-12 inches (25-300 mm)
- For installation in Types SRI-7RS and SRB-7RS, S90-7R, SRB-7FS, SPR-7R, SR-7R and TR-Series pretorqued safety heads
- Sanitary / Aseptic options are available

Manufacturing Design Range (MDR)

The standard LPS manufacturing design ranges are 0%, -5%, -10%. For tantalum, the MDR options are -5% and -10% only.

Burst Tolerance

Burst Pressure		Burst Tolerance (per ASME)
psig	barg	
28 and higher	1.93 and higher	±5%
20 to <28	1.38 to <1.93	±7%
10 to <20	0.69 to <1.38	±10%
<10	<0.69	±15%
Alternate:		±2 psi (0.138 bar)
<40	<2.76	

Performance Tolerance

Specified Burst Pressure		Performance Tolerance, standard* (per ISO / EN 4126)		
psig	barg	0% MDR	-5% MDR	-10% MDR
28 and higher	1.93 and higher	±5%	+5% /-10%	+5% /-15%
20 to <28	1.38 to <1.93	±7%	+7% /-12%	+7% /-17%
10 to <20	0.69 to <1.38	±10%	+10% /-15%	+10% /-20%
<10	<0.69	±15%	+10% /-25%	+10% /-30%
Alternate:		±10%	+10% /-15%	+10% /-20%
20 to <40	1.38 to <2.76			

* Select one. Special requests for performance tolerance accepted.



LPS™ Disk Specifications Minimum / Maximum Pressure with Rating at 72°F (22°C)

Disk Size		Nickel Alloy 200				316ss				Inconel® Alloy 600				Monel® Alloy 400				Hastelloy® Alloy C-276				Tantalum			
in	mm	psig		barg		psig		barg		psig		barg		psig		barg		psig		barg		psig		barg	
		Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max
1	25	15	70	1.03	4.83	15	70	1.03	4.83	20	70	1.38	4.83	20	70	1.38	4.83	15	70	1.03	4.83	20	70	1.38	4.83
1.5	40	6	55	0.41	3.79	6	55	0.41	3.79	10	55	0.69	3.79	10	55	0.69	3.79	7	55	0.48	3.79	10	55	0.69	3.79
2	50	5	40	0.34	2.76	5	40	0.34	2.76	8	40	0.55	2.76	8	40	0.55	2.76	6	40	0.41	2.76	8	40	0.55	2.76
3	80	5	35	0.34	2.41	5	35	0.34	2.41	7	35	0.48	2.41	7	35	0.48	2.41	5	35	0.34	2.41	7	35	0.48	2.41
4	100	5	30	0.34	2.06	5	30	0.34	2.06	7	30	0.48	2.06	7	30	0.48	2.06	5	30	0.34	2.06	7	30	0.48	2.06
6	150	5	25	0.34	1.72	5	25	0.34	1.72	7	25	0.48	1.72	7	25	0.48	1.72	5	25	0.34	1.72	7	25	0.48	1.72
8	200	5	25	0.34	1.72	5	25	0.34	1.72	7	25	0.48	1.72	7	25	0.48	1.72	5	25	0.34	1.72	7	25	0.48	1.72
10	250	5	25	0.34	1.72	5	25	0.34	1.72	7	25	0.48	1.72	7	25	0.48	1.72	5	25	0.34	1.72	7	25	0.48	1.72
12	300	5	25	0.34	1.72	5	25	0.34	1.72	7	25	0.48	1.72	7	25	0.48	1.72	5	25	0.34	1.72	7	25	0.48	1.72

Consult BS&B for applications where the disk may be rated with a coincident temperature below 300°F (149°C) (176°F (80°C) for Hastelloy) but operated at a higher value. Special processing may be required. **Note:** Hastelloy® is a trademark of Haynes International Inc. Monel® and Inconel® are registered trademarks of Special Metals Corporation and its subsidiaries.

Cycle Resistance / Temperature Influence / Service Life

The cycle resistance of the LPS disk is a function of the application operating conditions. If the operating pressure is static, (without pressure cycles), then as for all types of rupture disk devices, the service life shall be maximized. If the operating pressure is mildly cyclic, such as the conditions of a sealed atmospheric tank under ambient temperature fluctuations, the LPS disk may resist in excess of 1000 cycles.

Under highly cyclic operating pressure conditions, the cycle life of the LPS disk is determined by the frequency and magnitude of pressure change from positive to negative differential. When all of the pressure cycling takes place within the operating pressure ratio of the LPS disk and at a positive differential pressure, the service

life shall be maximized. Should the operating pressure cycle between full vacuum and positive pressure, the service life of the LPS disk can be anticipated at several hundred cycles. Cycle and service life for every rupture disk depends upon its unique application operating conditions. It is particularly important to allow for the temperature's influence on burst pressure; if the rated burst temperature of the disk is selected too low, a higher actual temperature may reduce the disk burst pressure. Seek advice from BS&B Safety Systems regarding rated burst temperature. Other application factors including corrosion, erosion, abrasion, product build-up and vibration, affect the service life of a rupture disk and must be considered by the user.

Vacuum Resistance / Back Pressure Resistance

The LPS disk will resist vacuum without the need for an additional vacuum support. Back pressure resistance is limited to 15 psig (1barg) for disks rated to burst at 15 psig (1barg) or less. For higher burst pressures, back pressure resistance is equal to the minimum burst pressure of the ordered LPS disk.

Maximum Recommended Temperatures

Material	Max. Temperature
Nickel (alloy 200)	750°F (399°C)
Monel® (alloy 400)	900°F (482°C)
Inconel® (alloy 600)	1100°F (593°C)
316 stainless steel	900°F (482°C)
Hastelloy® C-276 (alloy C-276)	900°F (482°C)
Titanium	572°F (300°C)
Tantalum	500°F (260°C)
Fluoropolymer liner (PTFE)	500°F (260°C)
Fluoropolymer liner (FEP, PFA)	400°F (204°C)



AMERICAS

Tulsa, OK USA

T: +1 918 622 5950
F: +1 918 665 3904
E: sales@bsbsystems.com

Houston, TX USA

T: +1 713 682 4515
F: +1 713 682 5992
E: sales@bsbsystems.com

Minneapolis, MN USA

T: +1 952 941 0146
F: +1 952 941 0646
E: sales@bsbipd.com

Edmonton, AB Canada

T: +1 780 955 2888
F: +1 780 955 3975
E: contacts@bsbprocess.com

Monterrey, Mexico

T: +011 52 81 8299 5861
T: +011 52 81 8299 5862
E: sales@bsbsystems.com

Sao Paulo, Brasil

T: +55 11 2084 4800
F: +55 11 2021 3801
E: sales@bsbbrasil.com

EUROPE, MIDDLE EAST & AFRICA

Limerick, Ireland

T: +353 61 484700
F: +353 61 227987
E: sales@bsb.ie

Düsseldorf, Germany

T: +49 211 930550
F: +49 211 3982171
E: info@bormann-neupertbsb.de

Manchester, UK

T: +44 161 955 4202
F: +44 161 870 1086
E: sales@bsb-systems.co.uk

Moscow, Russia

T: +7 495 747 5916
F: +7 499 133 4394
E: sales@bsbsystems.ru

The Hague, The Netherlands

T: +31 20 399 9965
F: +31 70 360 4724
E: info@bsbsystems.nl

Copenhagen, Denmark

T: +45 3318 9000
F: +45 3318 9001
E: info@bsbsystems.dk

ASIA PACIFIC

Singapore

T: +65 6513 9780
F: +65 6484 3711
E: sales@bsb.com.sg

Yokohama, Japan

T: +81 45 450 1271
F: +81 45 451 3061
E: information@bsb-systems.co.jp

Seoul, South Korea

T: +82 2 2636 9110
F: +82 2 2636 9120
E: sales@bsbsystems.kr

Shanghai, China

T: +86 21 6391 2299
F: +86 21 6391 2117
E: sales@bsbsystems.com

Chennai, India

T: +91 44 2450 4200
F: +91 44 2450 1056
E: sales@bsbsystems.com



Visit our website for the most complete, up-to-date information

Products, specifications and all data in this literature are subject to change without notice. Questions regarding product selection and specifications for specific applications should be directed to BS&B. All sales are subject to the BS&B companies' standard terms and conditions of sale. Nothing herein should be construed as a warranty of merchantability or fitness for a particular purpose.

www.bsbsystems.com | www.bsb.ie

© 2017 BS&B Innovations, Limited. Revised December 2021.