

ULTRAVAC 225

TABLETOP CHAMBER VACUUM PACKAGING MACHINE

The Space-Saving Ultravac 225



In less than 3.25 square feet (19"x24.6") of counter space you can begin vacuum packaging a wide range of small to large size products. Vacuum chamber size: 7.25" deep x 16.75" wide x 19.56" long.

Features:

- » Quick-change, 16" seal bar
- » Our Pozi-Pressure™ radius surface sealing element seals through contaminants, folds and wrinkles
- » Compact tabletop model saves valuable counter space
- » Simple operation and easy-to-use controls
- » Ideal for small to medium processors, restaurants and supermarkets



2 YEAR WARRANTY



ULTRAVAC 225

TABLETOP CHAMBER VACUUM PACKAGING MACHINE

Standard Features:

- » Busch® 021 vacuum pump
- » High density polyethylene filler boards
- » NEMA 4 washdown controls


Injection Molded From High-Tech, Engineered Composite

Space-age, engineered-resin composite materials in the Ultravac® 225's chamber lid, basin and chassis are amazingly flexible yet virtually indestructible. This composite was developed with input from a Technology Transfer Program between UltraSource and the U.S. Department of Energy. Both lid and basin are smooth and seamless with large radius corners for easy, thorough cleaning and inspection.

Product Specifications	
A. Length	19.25-in.
B. Width	25-in.
C. Maximum Height	32.25-in.
D. Working Height	14.375-in.
E. Seal Bar Length	16-in.
F. Chamber Length	19.56-in.
G. Chamber Width	16.75-in.
H. Chamber Depth	7.25-in.
Between Seal Bar and Back of Chamber	17.25-in.
Vacuum Pump	0.95kW (1.25hp)
Net Weight	121-lbs.
Electrical Connection	110V/60Hz (1-phase) 220V/50Hz (1-phase) 208V/230V, 60Hz (1-phase)

Quick-Change, 16" Seal Bar.

Features UltraSource's Pozi-Pressure™ radius-surface sealing element for sealing through contami-nates, folds and wrinkles

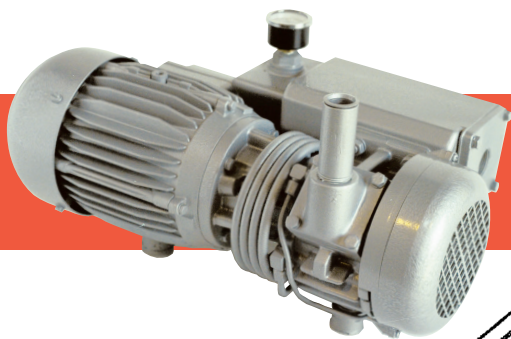

The heavy duty, 1.25-hp Busch® 021 vacuum pump powers the Ultravac® 250 for years of dependable service

