




KD 402 S


DOUBLE HEAD MITRE SAW MACHINE
ÇİFT KAFA KESME MAKİNESİ

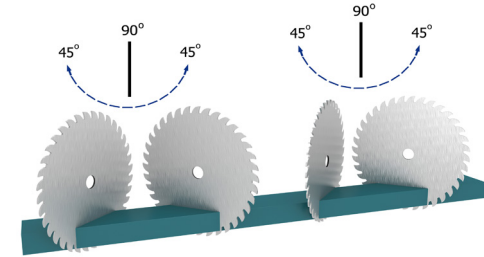


45° : 145 x 125 mm




90° : 205 x 125 mm







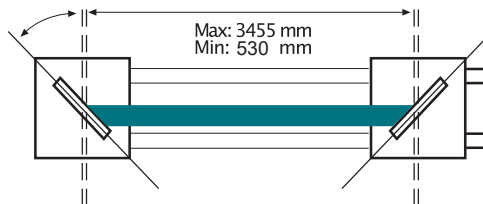

45° : 125 x 138 mm



90° : 175 x 138 mm



						
			Bar	Air Cons.		
4.5 kW / 9A 400V AC 3P PE 50-60 Hz.	D: Ø400 mm d: Ø30-32 mm	2.900 RPM	6-8 Bar	46 L/min.	129x556x144	482 593

GENERAL FEATURES

- Semi-automatic miter saw with two circular saws designed for flat or angled cutting of PVC, aluminium and wooden materials
- The left cutting unit is fixed, and the right cutting unit is moved manually to its position
- The distance between the cutting heads can be adjusted accurately by a digital display
- Pressure control valves on the clamps for the adjustment of the profile fixing
- Pivoting range +45°- 45° inwards and outwards infinitely adjustable
- Location points at 0°, 15°, 22.5°, 30° and 45 both left and right
- Max. cut length: 3.455 mm, min cut length: 530 mm
- Manual positioning of sawing heads
- On/off switch for horizontal clamp
- Pneumatic head fixing feature
- Two-hand safety operation
- Hydro-pneumatic saw feed

STANDARD ACCESSORIES

- Digital display indicating the cutting length
- Equipped with 2x Ø400 mm of saw blades
- Pneumatic spray mist lubrication system
- 3x pneumatic horizontal clamps
- 2x pneumatic vertical clamps
- Profile support mechanism
- Air gun

OPTIONAL ACCESSORIES

- Two-step of head speed control system (patented)
- VCE 1570 chip vacuum extractor & accessories
- DLG 200 digital profile length gauge
- DLG 300 digital profile length gauge
- Machine with 5m of length
- Spare saw blade Ø400 mm

GENEL ÖZELLİKLER

- PVC, alüminyum ve ahşap malzemeleri kesmek amacı ile 2 testereli kesme ünitesi
- Sol kesme ünitesi sabit olup sağ kesme ünitesi pozisyona manuel olarak kaydırılarak kesme yapılır
- Dijital ekran ile profil kesim boyunun optimum olarak ayarlanması
- Mengene profil sıkma ayarları için basınç kontrol valfleri
- 45° sol - 45° sağ ara derecelerde hassas kesim
- 0°-15°-22.5°-30°-45°lik açılarda içeri ve dışarı susta ile kesim
- Maksimum kesme boyu 3.455 mm ve minimum kesme boyu 530 mm
- Kesme kafalarının manuel olarak pozisyonlanması
- Yatay mingeneler için açma/kapama butonu
- Pnömatik kafa sabitleme özelliği
- Çift el kumanda uygulaması
- Hidro-pnömatik kontrollü testere hareketi

STANDART AKSESUARLAR

- Kesim boyunu gösteren dijital ekran
- 2x Ø400mm testere
- Püskürtmeli testere soğutma sistemi
- 3x pnömatik yatay mengene
- 2x pnömatik dikey mengene
- Profil destek ünitesi
- Hava tabancası

OPSİYONEL AKSESUARLAR

- Kesme kafalarında iki kademeli hız kontrol sistemi (patentli)
- VCE 1570 talaş emme sistemi & aksesuarları
- DLG 200 dijital profil boy ölçme cihazı
- DLG 300 dijital profil boy ölçme cihazı
- 5 metre boyunda makine
- Yedek testere Ø400mm

