







# ST 264

AUTOMATIC PVC WATER SLOT MACHINE  
OTOMATİK PVC SU TAHLİYE MAKİNESİ



						
			Bar	Air Cons.		
0,55 kW x 3 230V AC 1P N PE 50 Hz,	18.000 RPM	ø5xL80 / ø5xL60	6-8 Bar	19 L/min.	73x61x130	78 116

## GENERAL FEATURES


- Water slot opening process on PVC profiles is completed pneumatically
- Driller motors work separately in tree axis or two motors positioned in different axis work at the same time
- Practical adjustment of water slot length and depth by means of the stoppers
- Speed-adjustable pneumatically controlled motor movement
- 2x pneumatic clamps ensure precise machining of the profile
- Drilling starts automatically with the push of a button
- Axis misalignments in profiles are adjusted pneumatically with the movable table
- Motor selection through the switches
- PLC control system
- Maximum profile dimension: H: 115 x W: 100 mm

## STANDARD ACCESSORIES

- Equipped with milling cutters, Ø5 x L80 and Ø5 x L60 mm
- Service keys
- Air gun

## OPTIONAL ACCESSORIES

- Spare cutter bits Ø5 x L60 mm
- Spare cutter bits Ø5 x L80 mm

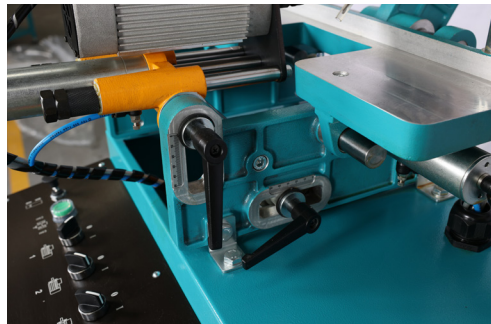

## GENEL ÖZELLİKLER

- Su tahliye kanalı açma işlemi pnömatik olarak tamamlanır
- Üç eksen de tek tek veya iki eksen de aynı anda su tahliye kanalı açabilme
- Dayamalar sayesinde su tahliye kanalı boyu ve derinliği pratik olarak ayarlanır
- Hızı ayarlanabilir pnömatik kontrollü motor hareketi
- 2x pnömatik mgeneler profilin hassas olarak işlenmesini sağlar
- Tek butona basarak delme işlemi otomatik olarak başlatılır
- Hareketli tabla ile profillerdeki eksen kaçıklıkları pnömatik olarak ayarlanır
- Butonlar ile motor seçimi
- PLC kontrol sistemi
- Maksimum profil ölçüleri H: 115 x W: 100 mm

## STANDART AKSESUARLAR

- Ø5 x L80 ve Ø5 x L60 mm freze uçları
- Servis anahtarı
- Hava tabancası

## OPSIYONEL AKSESUARLAR

- Yedek Ø5xL60 mm kesici takımlar
- Yedek Ø5xL80 mm kesici takımlar