



RYK 420 S

RADIAL SAW MACHINE
RADYAL KESME MAKINESİ

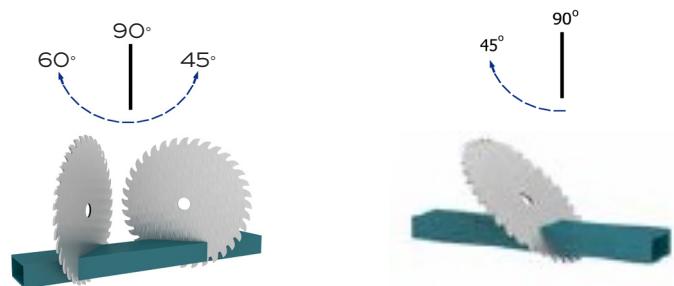

RYK 420 (Ø420 MM)

- 90° (400 x 165)
- 45° (285 x 165)
- 60° (200 x 165)
- 45° (400 x 95)
(TILTING)

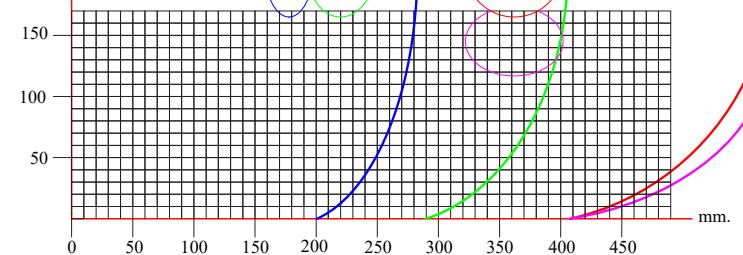

	D 		Bar	Air Cons.	Net 	WxLxH cm	KG
2.2 kW 4.7A 400/415V AC 3P 50-60 Hz.	D: Ø420 mm d: Ø30/32 mm	2.900 RPM	6-8	24 L/min.	184x76x159	202	255

GENERAL FEATURES

- Performing of different cutting operations are possible by means of the pivoting and tilting features
- Powerful cutting operations by means of the 2.2 kW 3.000 RPM motor
- Smooth movement, high precision and great sensitivity provided with gas spring, linear bearings and ergonomic handle
- Cast iron construction of the body that is strong and lasting
- Robust mechanical construction enables the ease of adjustment for the requested cutting angles
- Location points at 15° - 22,5° - 30° - 45° - 60° - 90° both left and right
- Pivoting range from 45° right to 60° left infinitely adjustable
- Tilting range from 90° to 45° left

STANDARD ACCESSORIES

- Equipped with Ø420 mm saw blade for aluminium cutting operations
- 2x pneumatic vertical clamp
- Spray saw blade lubrication system
- Laser marking indicating the cutting line
- Brake unit working with motor stop button
- Digital display for ease adjustment of pivoting angle
- Air gun

OPTIONAL ACCESSORIES

- Hydraulic control unit for saw head feedrate
- Special miter for longitudinal cutting operations
- MKN 301 length stop
- DKN 302 length stop
- Connection kit for DKN and MKN length stops
- Spare saw blade for aluminium cutting, Ø420 mm



GENEL ÖZELLİKLER

- Testerenin kaidesinin yatar ve döner özelliği ile farklı kesim operasyonları yapmak mümkündür
- 2,2 kW, 3.000 RPM kesme motoru ile güçlü kesme operasyonları
- Kesme işlemlerini kolaylaştırın yüksek hassasiyetli lineer yataklama, gaz amortisörler ve ergonomik kol tasarımı.
- Dökme demir malzemeden imal edilmiş makine gövdesi ve çelik sacdan üretilmiş makine sehpası
- İstenilen açılarla kolay ayarlanabilir mekanik altyapı
- 15° - 22,5° - 30° - 45° - 60° - 90° lik açılarda sağ ve sol yönde susta ile kesim
- 60° sağ - 45° sol ara derecelerde hassas kesim
- 90° - 45° aralığında sola yatar kesim

STANDART AKSESUARLAR

- Alüminyum kesmeye uygun Ø420 mm testere takılı olarak
- 2x pnömatik dikey mengene
- Testere soğutma ünitesi
- Kesme hattını gösteren lazer işaretleme
- Motor stop butonu ile çalışan frenleme tertibatı
- Tabla dönme açısını gösteren dijital açı okuyucu
- Hava tabancası

OPSİYONEL AKSESUARLAR

- Hidrolik geri frenleme sistemi
- Bıçme操作ları için özel gönye
- MKN 301 konveyör
- DKN 302 konveyör
- DKN ve MKN konveyörler için bağlantı kiti
- Yedek Ø420 mm alüminyum testeresi

