







# SNM 560 SRV

SERVO CONTROLLED ALUMINIUM FACADE NOTCHING MACHINE  
SERVO KONTROLLÜ ALÜMİNYUM CEPHE KERTME MAKİNESİ



						
			Bar	Air Cons.		
10.2 kW 400V AC 3P PE 50-60 Hz	D1: Ø550/ D2: Ø500 d: 30 mm	2.700 RPM	6-8 Bar	160 L/min.	160x300x190	1.200 1.350

## GENERAL FEATURES



- Equipped with 4x axis servo controlled motors for automatic adjustment of the horizontal and vertical saw blades for angle cutting as well as notching height and depth of the profile
- 4x pneumatic clamps that allow the profile to be credibly attached at any angle
- Cast iron and steel construction of the body that is strong and lasting
- Miter adjustment of the profile by manual with digital screen
- The input of the values is made via the keyboard
- Semi-Automatic sawing unit with adjustable feeding speed by hydro-check cylinder
- 1x saw unit lower (vertical) with Ø550 mm dia. and 1x saw unit upper (horizontal) with Ø500 mm dia.
- Pneumatically operated safety cover
- Very easy saw wear adjustment
- Two-hand safety module
- Interior LED lighting

## STANDARD ACCESSORIES

- Equipped with 1x Ø500 ve 1x Ø550 mm saw blades
- 2x spray saw blade lubrication system
- 2x pneumatic horizontal clamps
- 2x pneumatic vertical clamps
- Swarf pan

## OPTIONAL ACCESSORIES

- Lazer marker indicating the vertical line of the profile
- Profile support arm RS 1000
- Spare saw blade, Ø500 mm
- Spare saw blade, Ø550 mm

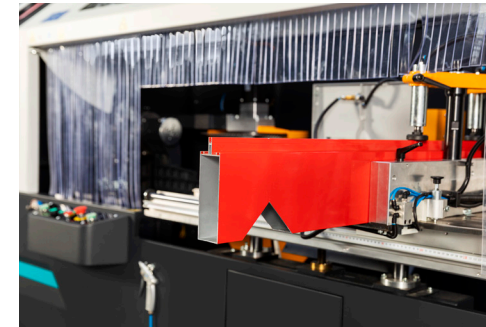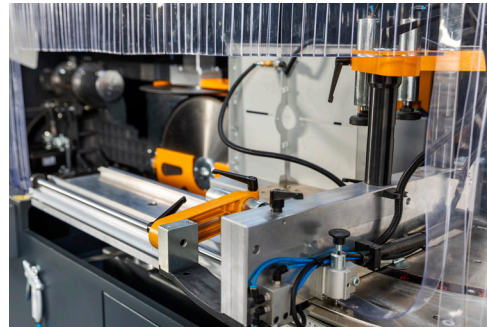

## GENEL ÖZELLİKLER

- Her iki testerenin açılmal hareketleri ile kertmenin yüksekliđi ve derinlikleri 4 adet servo motor ile kontrol edilebilmektedir
- Profilin emniyetli bir şekilde her açıda bağlanmasını sađlayan 4x pnömatik mengene
- Dökme demir ve çelik konstrüksiyondan yapılmış uzun ömürlü ve sađlam gövde
- Profilin tablanın gönye açıl ayarıl el ile dijital ekran yardımı ile ayarlanılır
- Kertme işleml için gerekli tüm bilgiler ekran klavye ile girilebilmektedir
- Lineer yataklı, kesme hızıl ayarlanabilir otomatik testere ünitesi
- Dikey konumda Ø550 ve yatay konumda Ø500 mm çaplı testerelele
- Pnömatik olarak çalışlan güvenlik kapađı
- Çok kolay testere aşınma ayarlaması
- Çift el güvenlik modülü
- Kabin içinde LED aydınlatma

## STANDART AKSESUARLAR

- 1x Ø500 ve 1x Ø550 mm testerelele takılı olarak
- 2x testere sođutma sistemi
- 2x pnömatik hareketli yatay mengene
- 2x pnömatik dikey mengene
- Talaş tavaşı

## OPSİYONEL AKSESUARLAR

- Profilin dikey kesme hattını gösteren lazer indikatör
- Ayarlanabilir profil destek ayađı RS 1000
- Yedek Ø500 mm özel kertme testeresi
- Yedek Ø550 mm özel kertme testeresi