




14750 INDUSTRIAL PARKWAY
Cleveland, Ohio 44135
Phone: (216) 433-7766
Fax: (216) 433-7664
www.control-line.com
E-mail: sales@control-line.com


HYDRAULIC HAND PUMPS

SERIES 500/550

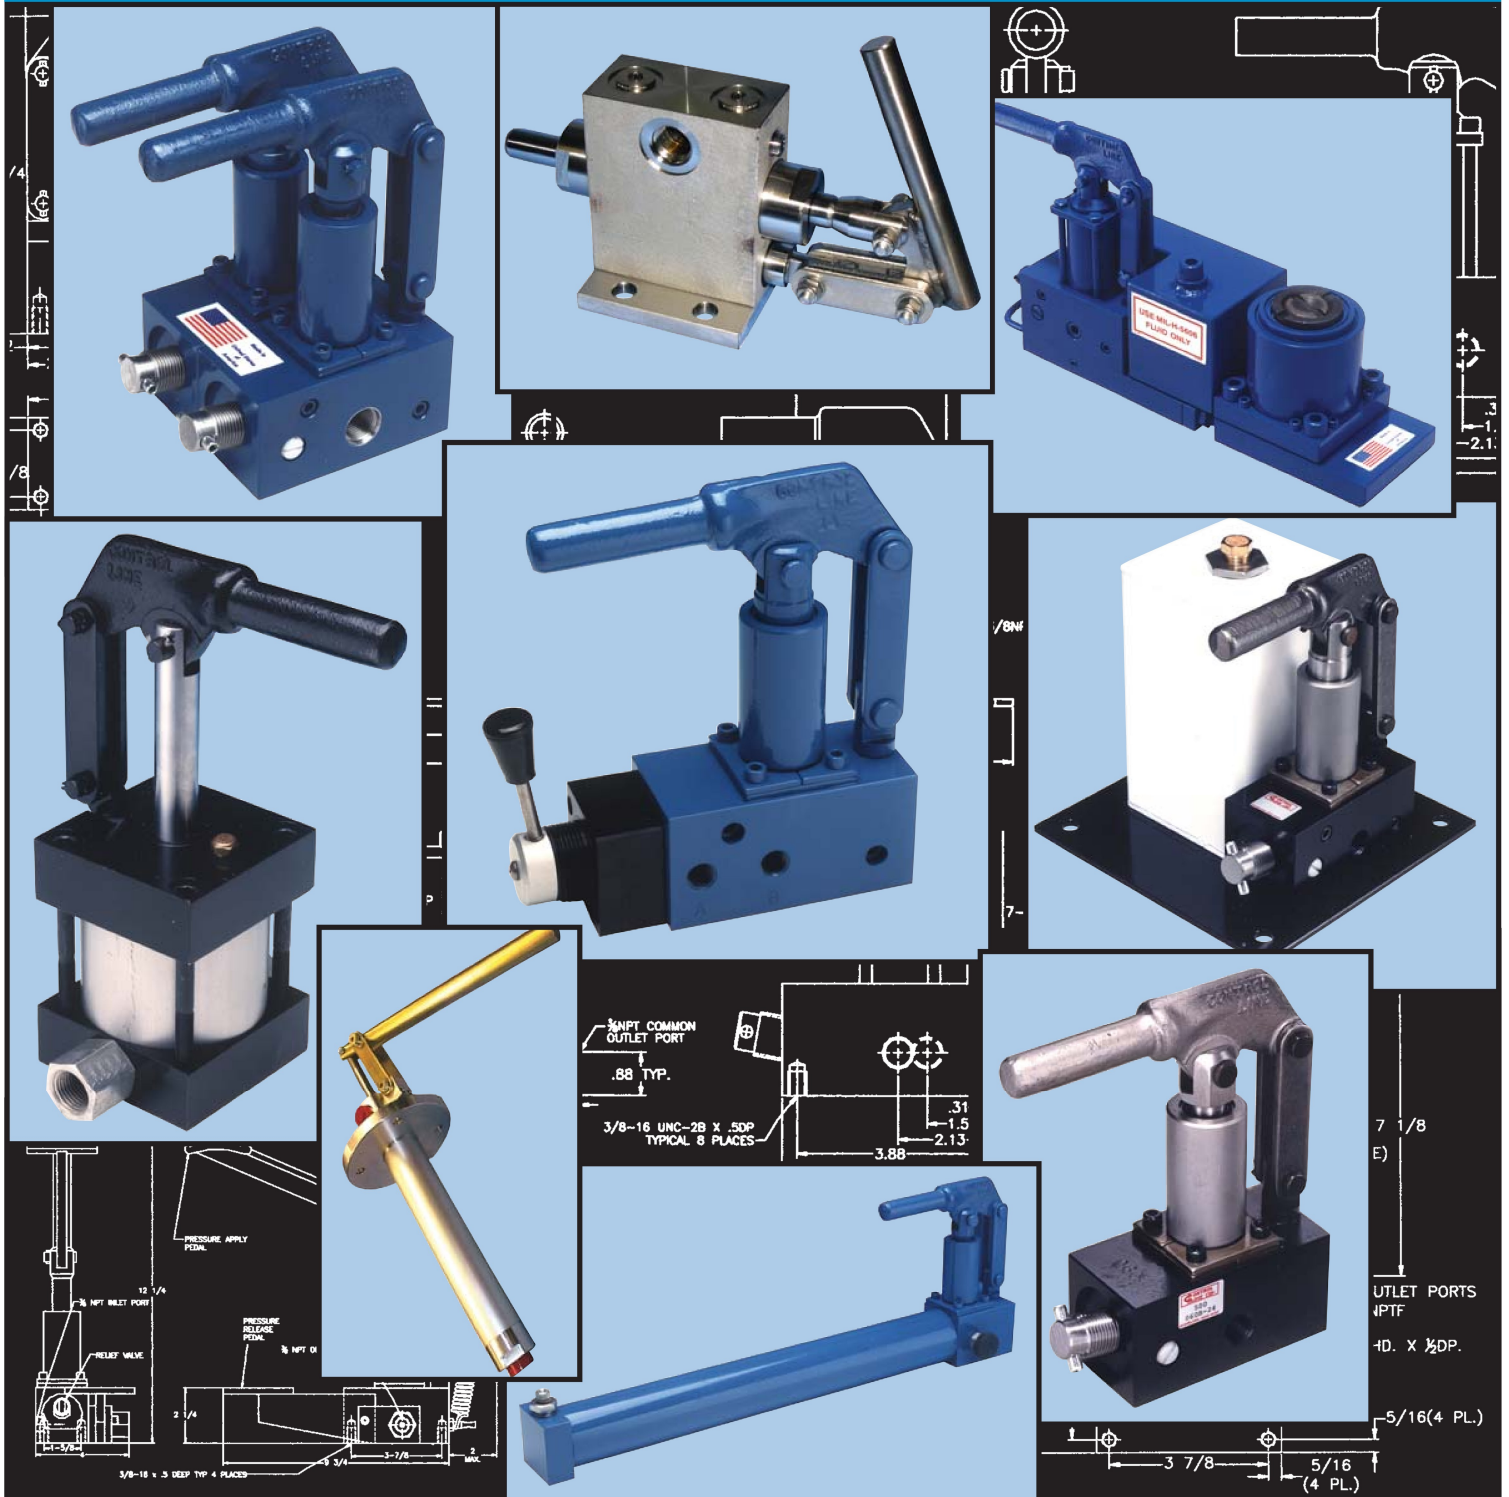


TANDEM PUMPS

Tandem configuration pumps combine any two modular pumps into a single unit. This configuration can yield up to three different displacements and is available with common or separate inlets and outlets. Reservoirs and mounting plates can be added to complete the package. All of the same standard and optional features from the 500/550 series are included in the tandem pumps. A special handle assembly is provided as standard to operate both pumps or just one. Triple and quadruple units are also available consult the factory for details.

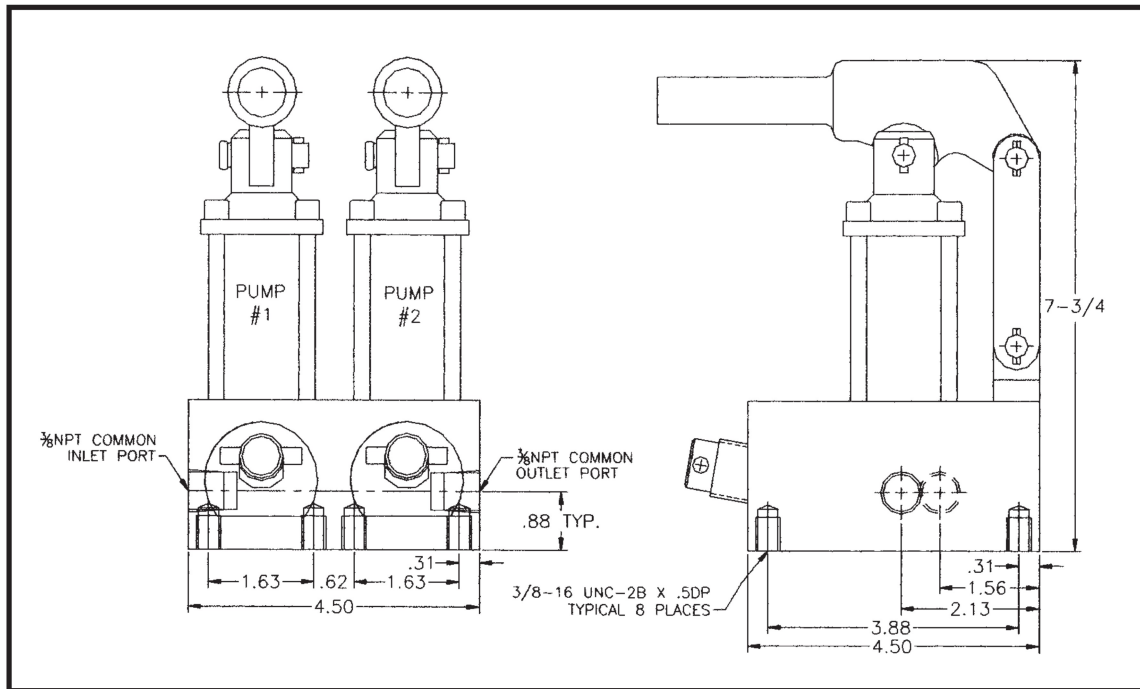

ORDERING INFORMATION

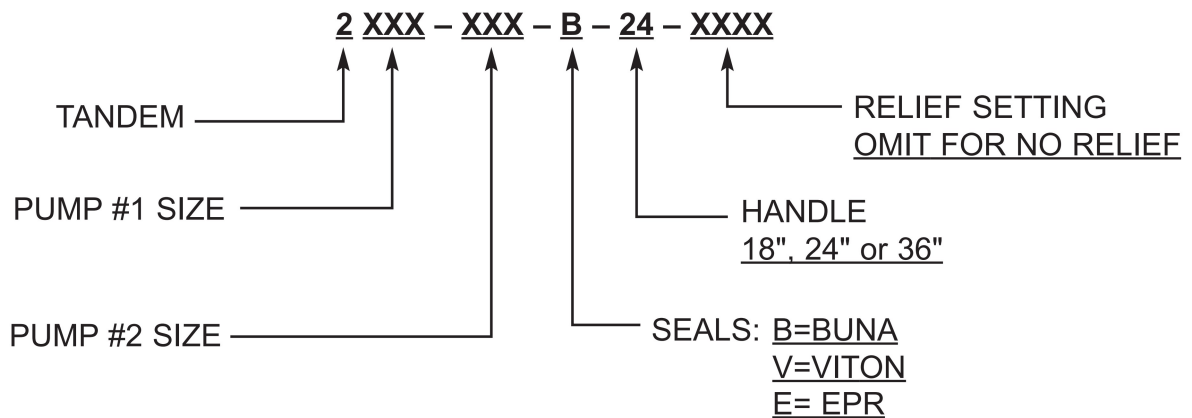

Standard sizes are 030 for 3/8, 040 for 1/2", 050 for 5/8", 060 for 3/4", 080 for 1", 120 for 1-1/2", 124 -125-126 are for two stage configurations. Any two size pumps can be combined, maximum pressure rating is a function of the final configuration, consult engineering for rating. When operated together the displacements and handle forces are cumulative, add for total displacement and force.

Standard configuration is for a common inlet and common outlet, if required a common inlet with separate outlets is available – consult factory.