

FACE SEAL	ORDERING	DIMENSIONS			
SIZE	NUMBER	[A]	[B]	[C]	[D]
1/4	CFR-4-X-X	1.55	5/8	0.18	*

## MATERIAL DESIGNATORS

S = 316L SST SEMI F20

A = 316L

B = 316L SST SEMI F20 VIM/VAR

N = NICKEL 200

M = NICKEL 400

H = NICKEL ALLOY C22


PURITY DESIGNATORS


S = STANDARD FINISH

H = HIGH PURITY

U = ULTRA-HIGH PURITY

\*WHEN ORDERING, MUST SPECIFY ORIFICE DIAMETER [D] OR THE FOLLOWING: GAS TYPE, FLOW RATE, INLET PRESSURE, AND OUTLET PRESSURE.

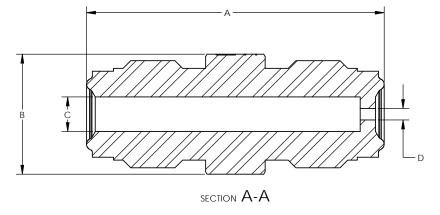



2/6/2017 ASME Y14.5 - 2009 CONVENTIONAL FLOW RESTRICTOR 1/4" FACE SEAL

DRAWINGS FOR SPECIFICATION PURPOSES AND ARE FOR REFERENCE ONLY.

ALL VERSIONS OF THE DRAWING ARE SUPERSEDED BY THIS RELEASE AND SUBJECT TO CHANGE WITHOUT NOTIFICATION.

CFR-4-X-X SHEET 1 OF 1