


Water Hose Reel

Open Type


It is selectable between an automatic and manual rewind typed water hose reel. According to use and function, it ranges from a corrosion resistance stainless hose reel to hose reel for food and beverage; and water reel for high pressure and for balcony. Reels for specially-equipped vehicles and fire engines are made by customer order.

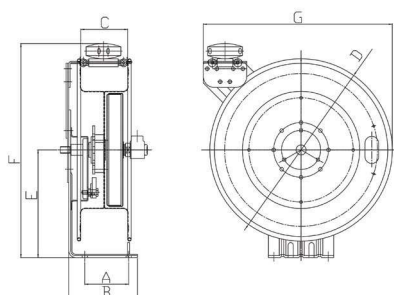

SJ Series (Water Reel)

- Application : Construction site, industrial site, Laboratory
- Feature : Compact size, Automatic rewind, Single steel frame
- Installation : Wall, Ceiling

Model	Hose			W,P Max (kg/cm ²)	External Dimensions (mm)							Weight (kg)
	Material	I,D (mm)	L (M)		A	B	C	D	E	F	G	
SRWA-910	Synthetic Rubber	9,5	10	20	101	158	105	Ø420	248	493	435	17
SRWA-915	Synthetic Rubber	9,5	15	20	101	158	105	Ø420	248	493	435	18
SRWA-920	Synthetic Rubber	9,5	20	20	101	158	110	Ø500	288	578	517	19
SRWA-1310	Synthetic Rubber	13	10	20	101	158	105	Ø420	248	493	435	18
SRWA-1315	Synthetic Rubber	13	15	20	101	158	105	Ø420	248	493	435	19
SRWA-1320	Synthetic Rubber	13	20	20	101	158	110	Ø500	288	578	517	24

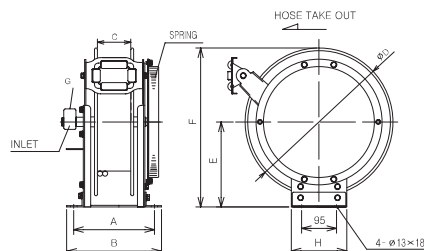

RWA-SK Series

- Application : Food factory, Construction site, Industrial site
- Features : Solid frame, Long-lasting sealing, Powerful spring
- Installation : Wall, Floor (Within 4M height, If installed over 4M, it could not rewind.)

Model	Hose			W,P Max (kg/cm ²)	External Dimensions (mm)								Weight (kg)
	Material	I,D (mm)	L (M)		A	B	C	D	E	F	G	H	
RWA-1320	Synthetic Rubber	13	20	20	278	318	150	450	260	485	PT1/2"	150	27
RWA-1325	Synthetic Rubber	13	25	20	278	318	150	500	290	540	PT1/2"	150	30
RWA-1330	Synthetic Rubber	13	30	20	278	318	150	500	290	540	PT1/2"	150	32,4
RWA-1340	Synthetic Rubber	13	40	20	338	378	210	500	290	540	PT1/2"	200	40
RWA-1610	Synthetic Rubber	16	10	20	278	318	150	450	260	485	PT1/2"	150	26
RWA-1615	Synthetic Rubber	16	15	20	278	318	150	450	260	485	PT1/2"	150	29
RWA-1620	Synthetic Rubber	16	20	20	278	318	150	500	290	540	PT1/2"	150	32
RWA-1625	Synthetic Rubber	16	25	20	338	378	210	500	290	540	PT1/2"	200	36
RWA-1630	Synthetic Rubber	16	30	20	338	378	210	500	290	540	PT1/2"	200	40
RWA-1640	Synthetic Rubber	16	40	20	338	378	210	550	315	590	PT1/2"	200	45
RWA-1910	Synthetic Rubber	19	10	20	338	378	210	450	290	515	PT3/4"	200	28,7
RWA-1915	Synthetic Rubber	19	15	20	338	378	210	450	290	515	PT3/4"	200	34
RWA-1920	Synthetic Rubber	19	20	20	338	378	210	500	290	540	PT3/4"	200	38
RWA-1925	Synthetic Rubber	19	25	20	338	378	210	550	315	590	PT3/4"	200	42
RWA-1930	Synthetic Rubber	19	30	20	338	378	210	550	315	590	PT3/4"	200	45
RWA-2510	Synthetic Rubber	25	10	20	338	378	210	450	290	515	PT1"	200	35
RWA-2515	Synthetic Rubber	25	15	20	338	378	210	500	315	565	PT1"	200	38
RWA-2520	Synthetic Rubber	25	20	20	408	448	280	500	315	565	PT1"	200	43,6
RWA-2525	Synthetic Rubber	25	25	20	408	448	280	550	345	620	PT1"	200	48,6
RWA-2530	Synthetic Rubber	25	30	20	408	448	280	550	345	620	PT1"	200	50,5