


Oil, Grease & High Pressure Hose Reel

Open Type



RWA&RHA&RA - TYPE(32-1,43-2,48-1)

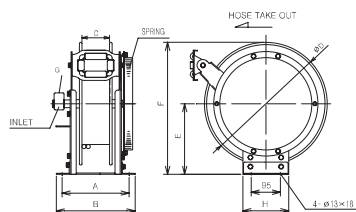


RHA Series

- Application : Car service center, Industrial site, Steel mills, Oil depots of power plants
- Features : Solid frame, High durability seals, Powerful spring
- Installation : Wall, Floor (Within 4M height, If installed over 4M, it could not rewind.)

Model	Hose			W,P Max (kg/cm ²)	External Dimensions (mm)								Weight (kg)
	Size	I,D (mm)	L (M)		A	B	C	D	E	F	G	H	
RHA-610	1/4" ×1W	6,4	10	190	216	256	90	400	230	430	PT1/4"	150	16,5
RHA-615	1/4" ×1W	6,4	15	190	216	256	90	400	230	430	PT1/4"	150	19
RHA-620	1/4" ×1W	6,4	20	190	236	276	110	400	230	430	PT1/4"	150	21,3
RHA-625	1/4" ×1W	6,4	25	190	236	276	110	450	260	485	PT1/4"	150	25,8
RHA-630	1/4" ×1W	6,4	30	190	236	276	110	450	260	485	PT1/4"	150	28
RHA-910	3/8" ×1W	9,5	10	150	216	256	90	400	230	430	PT3/8"	150	22
RHA-915	3/8" ×1W	9,5	15	150	236	276	110	400	230	430	PT3/8"	150	24
RHA-920	3/8" ×1W	9,5	20	150	236	276	110	450	260	485	PT3/8"	150	27
RHA-925	3/8" ×1W	9,5	25	150	278	318	150	500	290	540	PT3/8"	200	31,5
RHA-930	3/8" ×1W	9,5	30	150	278	318	150	500	290	540	PT3/8"	200	35
RHA-1310	1/2" ×1W	12,5	10	140	278	318	150	400	230	430	PT1/2"	150	24
RHA-1315	1/2" ×1W	12,5	15	140	278	318	150	400	230	430	PT1/2"	150	26
RHA-1320	1/2" ×1W	12,5	20	140	278	318	150	450	260	485	PT1/2"	150	32
RHA-1325	1/2" ×1W	12,5	25	140	278	318	150	500	290	540	PT1/2"	200	36
RHA-1330	1/2" ×1W	12,5	30	140	278	318	150	500	290	540	PT1/2"	200	38
RHA-1910	3/4" ×1W	19	10	80	338	378	210	450	290	515	PT3/4"	200	34
RHA-1915	3/4" ×1W	19	15	80	338	378	210	450	290	515	PT3/4"	200	37
RHA-1920	3/4" ×1W	19	20	80	338	378	210	500	290	540	PT3/4"	200	40
RHA-1925	3/4" ×1W	19	25	80	338	378	210	550	315	590	PT3/4"	200	45
RHA-1930	3/4" ×1W	19	30	80	338	378	210	550	315	590	PT3/4"	200	48
RHA-2510	1" ×1W	25	10	70	338	378	210	450	290	515	PT1"	200	36
RHA-2515	1" ×1W	25	15	70	408	448	280	500	315	565	PT1"	200	39
RHA-2520	1" ×1W	25	20	70	408	448	280	500	315	565	PT1"	200	44
RHA-2525	1" ×1W	25	25	70	408	448	280	550	345	620	PT1"	200	44

RWA&RHA&RA - TYPE(32-1,43-2,48-1)



RHA-G Series

- Application : Large-sized car service center, Manufacturing heavy machinery, Grease supply lines of steel mills
- Features : Solid frame, High durability seals, Powerful spring
- Installation : Wall, Floor (Within 4M height, If installed over 4M, it could not rewind.)

Model	Hose			W,P Max (kg/cm ²)	External Dimensions (mm)								Weight (kg)
	Size	I,D (mm)	L (M)		A	B	C	D	E	F	G	H	
RHA-610G	1/4" ×2W	6,4	10	350	216	256	90	400	230	430	PT1/4"	150	16,5
RHA-615G	1/4" ×2W	6,4	15	350	216	256	90	400	230	430	PT1/4"	150	19
RHA-620G	1/4" ×2W	6,4	20	350	236	276	110	400	230	430	PT1/4"	150	21,3
RHA-625G	1/4" ×2W	6,4	25	350	236	276	110	450	260	485	PT1/4"	150	25,8
RHA-630G	1/4" ×2W	6,4	30	350	236	276	110	450	290	515	PT1/4"	200	28
RHA-910G	3/8" ×2W	9,5	10	280	216	256	90	400	230	430	PT3/8"	150	27
RHA-915G	3/8" ×2W	9,5	15	280	236	276	110	450	260	485	PT3/8"	150	29
RHA-920G	3/8" ×2W	9,5	20	280	236	276	110	450	260	485	PT3/8"	150	33
RHA-925G	3/8" ×2W	9,5	25	280	278	318	150	500	290	540	PT3/8"	200	38
RHA-930G	3/8" ×2W	9,5	30	280	278	318	150	500	290	540	PT3/8"	200	43