
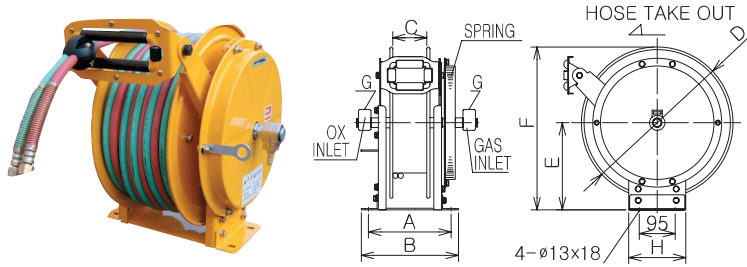


Gas Hose Reel


Open Type



RGA-SK Series

- Application : Gas welding, Cutting
- Features : Solid frame, Built-out spring
- Installation : Wall, Floor (Within 3M height, If installed over 4M, it could not rewind.)

Model	Hose			W.P Max (kg/cm ²)	External Dimensions (mm)								Weight (kg)
	Material	I,D (mm)	L (M)		A	B	C	D	E	F	G	H	
RGA-620	Rubber Hose	6	20	10	238	278	110	400	230	430	PT1/4"	150	24
RGA-625	Rubber Hose	6	25	10	238	278	110	450	260	485	PT1/4"	150	29
RGA-630	Rubber Hose	6	30	10	278	318	150	450	260	485	PT1/4"	150	32
RGA-815	Rubber Hose	8	15	10	278	318	150	400	230	430	PT1/4"	150	24,7
RGA-820	Rubber Hose	8	20	10	278	318	150	450	260	485	PT1/4"	150	28
RGA-825	Rubber Hose	8	25	10	278	318	150	500	290	540	PT1/4"	150	33
RGA-830	Rubber Hose	8	30	10	278	318	150	500	290	540	PT1/4"	150	36

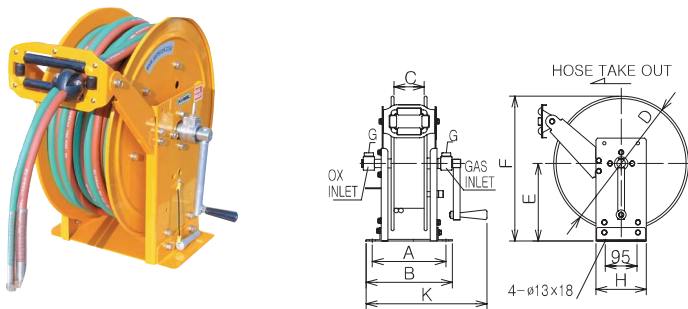

RGM-SK Series

Manual Rewind

- Application : Gas welding, Cutting
- Features : Solid stand frame, Manual rewind
- Installation : Fixed to the floor

Model	Hose			W,P Max (kg/cm ²)	External Dimensions (mm)									Weight (kg)
	Material	I,D (mm)	L (M)		A	B	C	D	E	F	G	H	K	
RGM-620	Rubber Hose	6	20	10	238	278	110	400	230	430	PT1/4"	150	380	20
RGM-630	Rubber Hose	6	30	10	278	318	150	450	260	485	PT1/4"	150	420	23
RGM-640	Rubber Hose	6	40	10	278	318	150	500	290	540	PT1/4"	150	420	25
RGM-650	Rubber Hose	6	50	10	338	378	210	450	260	485	PT1/4"	150	480	32
RGM-820	Rubber Hose	8	20	10	278	318	150	450	260	485	PT1/4"	150	420	21,3
RGM-830	Rubber Hose	8	30	10	278	318	150	500	290	540	PT1/4"	150	420	27,8
RGM-840	Rubber Hose	8	40	10	338	378	210	500	290	540	PT1/4"	150	480	33
RGM-850	Rubber Hose	8	50	10	338	378	210	550	315	590	PT1/4"	200	480	39