

Vacuplus MINI Di16-2

Item number: 02.23.777



Technical data




Description	Unit	Value
Material	-	Al. Nitrile (NBR). POM. SS
Temperature, max.	°F	122
Temperature, min.	°F	14
Weight, max.	oz	2.54
Feed pressure, max.	psi	102
Noise level, max.	dBA	81
Noise level, min.	dBA	74

Performance

Feed pressure	Air consumption	Vacuum flow (scfm) at different vacuum levels (-inHg)													Max vacuum
psi	scfm	0	2	5	8	11	14	17	20	23	26	29	32	35	psi
87.023	1.59	0.19	0.17	0.14	0.12	0.1	0.086	0.053	0.012	0	0	0	0	0	≥10.58

Feed pressure	Air consumption	Evacuation time (s/cf) to reach different vacuum levels (-inHg)													Max vacuum
psi	scfm	2	5	8	11	14	17	20	23	26	28	29	29	29	psi
87.023	1.59	0.1	0.17	0.25	0.34	0.47	0.74	0	0	0	0	0	0	0	≥10.58

Dimensional drawings

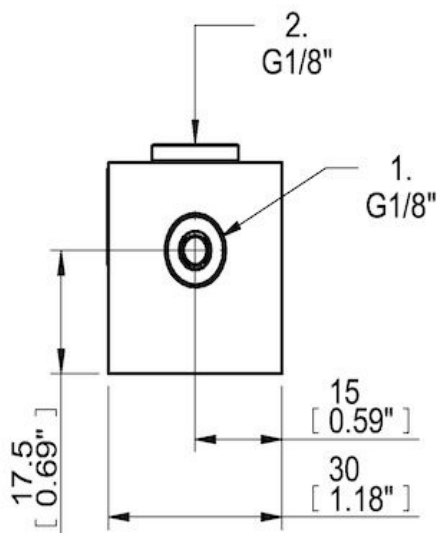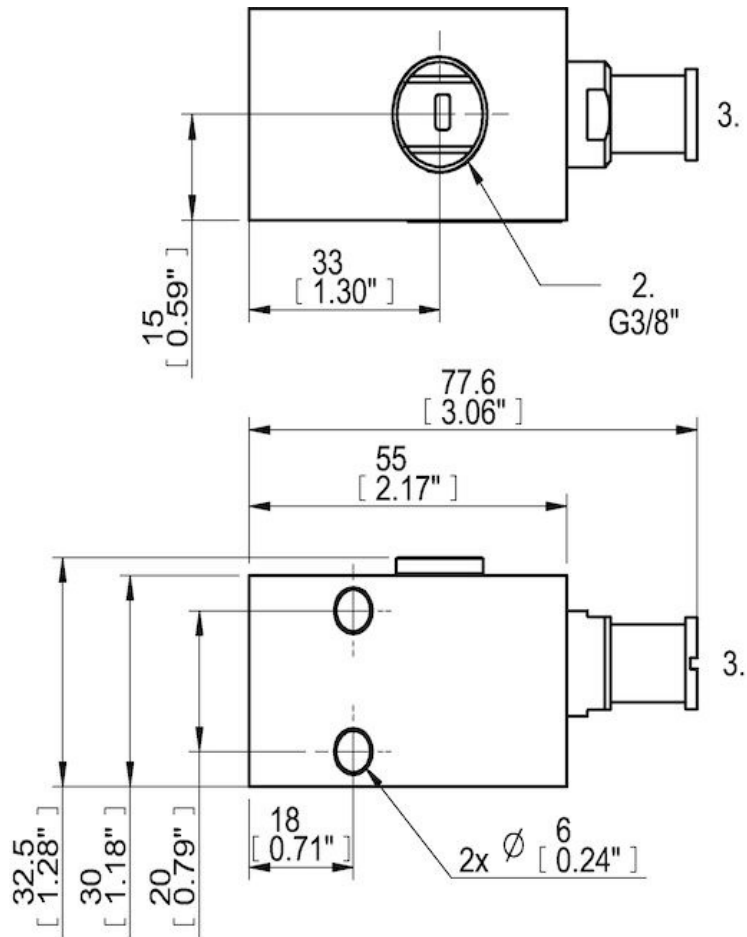

Values specified in this datasheet are tested at (unless otherwise stated):

- Room temperature (20°C [68°F] ± 3°C [5.5°F]).
- Standard atmosphere (101.3 [29.9 inHg] ± 1.0 kPa [0.3 inHg]).
- Compressed air quality, DIN ISO 8573-1 class 4.

Tolerance and accuracy:

- Feed pressure tolerance ± 0.02 MPa [2.9 psi]
- Vacuum flow/evacuation time accuracy $\pm 10\%$.