

# Conductivity Meter LF9648



## Characteristics

The Conductivity Meter LF9648 has been designed for the measurement of conductivity, as a degree of the purity or concentration of a liquid. In connection with 4-electrode-conductivity cells a high accuracy and insensitivity of contamination can be achieved. A further advantage is a broad range of application with only one cell. Only for measurement in ultra-pure water a special 2-electrode conductivity cell must be used.

## Technical data

### Power supply

Supply voltage : 230 V AC  $\pm 10\%$ ; 115 V AC  $\pm 10\%$ ;  
24 V AC  $\pm 10\%$  or 24 V DC  $\pm 15\%$

Power consumption : max. 3.5 VA, 5 VA with analog output

Operating temp. :  $-10..+55\text{ }^{\circ}\text{C}$

CE-conformity : EN 61326-1:2013  
EN 60664-1:2007

### Inputs

MR conductivity : 0..2.000(0)  $\mu\text{S/cm}$  up to  
0..2000 / 200(0)  $\text{mS/cm}$  (at  $25\text{ }^{\circ}\text{C}$ )

-Cell constant : 0.080..9.999

-Accuracy : 0.5 % of the measuring value,  $\pm 2$  Digit

-Temperature comp. : non linear for ultra pure water and natural  
water or linear programmable from  
0.000..9.999 %/K

MR temperature :  $-50.0..+200.0\text{ }^{\circ}\text{C}$ ; Sensor Pt100 or Pt1000

-Accuracy :  $\pm 0.2\text{ }^{\circ}\text{C}$

**Display** : LED red, 14.2 mm

Indicating range : 2000(0) Digit with leading zero suppression

Parameter display : LED 2-digit red, 7 mm  
(parameter - and output indicator)

### Outputs

Relay : SPDT  $< 250\text{ V AC}$   $< 250\text{ VA}$   $< 2\text{ A}$ ,  
 $< 300\text{ V DC}$   $< 50\text{ W}$   $< 2\text{ A}$

Transistor : transistor,  $< 35\text{ V AC/DC}$ , max.100 mA,  
short circuit protected

### Analog output

Active : 0/4..20 mA burden  $\leq 500\text{ }\Omega$ ;  
0/2..10 V burden  $> 500\text{ }\Omega$ , isolated  
automatic burden changing  
(burden dependent)

Passive : 4..20 mA, ext.  
burden =  $RA[\Omega] \leq (\text{supply} - 5\text{ V}) \div 0.02\text{ A}$ ;  
supply voltage 5..30 V DC,

Accuracy : 0.1 %; TK 0.01 %/K


**Case** : panel mounting DIN 96x48 mm,  
material PA6-GF; UL94V-0

Dimensions : front 96x48 mm, mounting depth 100 mm,

Weight : max. 390 g


Connection : clamp terminals, 0.08..1.5  $\text{mm}^2$ ,  
AWG28..AWG14

## Dimensions

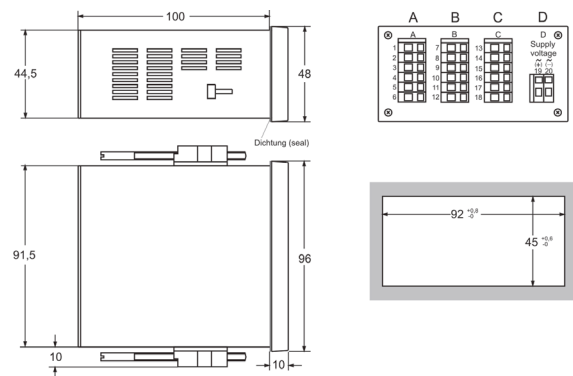

## Connection diagram

### Terminal strip A



## Ordering code

LF9648 -  -  -  -  -  -  -

### 1. Terminal strip A

1	input for 2- or 4-electrode-cells, temperature compensation via Pt100
3	as 1, but temperature compensation via Pt1000

### 2. Terminal strip B

00	not installed
2R	2 relay outputs
2T	2 electronic outputs

### 3. Terminal strip C

00	not installed
2R	2 relay outputs
2T	2 electronic outputs
AO	analog output 0/4..20 mA, 0/2..10 V DC
2A	2 analog outputs 4..20 mA passive

### 4. Terminal strip D Supply voltage

0	230 V AC	$\pm 10\%$ 50-60Hz
1	115 V AC	$\pm 10\%$ 50-60Hz
4	24 V AC	$\pm 10\%$ 50-60Hz
5	24 V DC	$\pm 15\%$

### 5. Options

00	without option
01	min- and max-peak hold
14	measuring/monitoring acc. to USP<645>

### 6. Unit appears on the unit field

### 7. Additional text above the display (3x90 mm HxW)

Connection diagram for terminal strip B-D see page Fehler:  
Referenz nicht gefunden