


## Inductive sensor NI50U-CK40-AP6X2-H1141



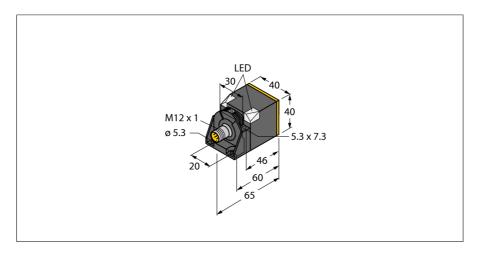

Type code Ident no.	NI50U-CK40-AP6X2-H1141 1625837	
Rated switching distance Sn	50 mm	
Mounting conditions	non-flush, flush	
Assured switching distance	≤ (0,81 x Sn) mm	
Repeatability	≤ 2 % of full scale	
Temperature drift	≤ <b>± 10</b> %	
	$\leq$ ± 20 %, $\leq$ -25 °C v $\geq$ +70 °C	

Hysteresis Ambient temperature	315 % -30+85 °C

Operating voltage	10 30VDC
Residual ripple	$\leq$ 10 % $U_{ss}$
DC rated operational current	≤ 200 mA
No-load current I₀	≤ 15 mA
Residual current	$\leq$ 0.1 mA
Rated insulation voltage	$\leq 0.5 \text{ kV}$
Short-circuit protection	yes/ cyclic
Voltage drop at I <sub>e</sub>	≤ 1.8 V
Wire breakage / Reverse polarity protection	yes/ complete
Output function	3-wire, NO contact, PNP
Protective insulation	
Switching frequency	0.25 kHz


Construction	rectangular, CK40
Dimensions	65 x 40 x 40 mm
	variable orientation of active face in 5 directions
Housing material	Plastic, PBT, black
Connection	Flange connector, M12 x 1

Connection	Flange connector, M12 x 1
Vibration resistance	55 Hz (1 mm)
Shock resistance	30 g (11 ms)
Protection class	IP68
MTTF	874 years acc. to SN 29500 (Ed. 99) 40 °C

Power-on indication	2 LEDs green
Switching state	LED yellow
Included in delivery	Fixing clamp BS4-CK40

- Rectangular, height 40 mm
- Variable orientation of active face in 5 directions
- Plastic, PBT-GF30-V0
- High luminance corner LEDs
- Optimum view on supply voltage and switching state from any position
- Factor 1 for all metals
- Increased switching distance
- Protection class IP68
- Resistant to magnetic fields
- Auto-compensation protects against pre-attenuation
- Partially embeddable
- DC 3-wire, 10...30 VDC
- NO contact, PNP output
- M12 x 1 male connector

#### Wiring Diagram



### **Functional principle**

Inductive sensors detect metal objects contactless and wear-free. Due to the patented multi-coil system, *uprox*®+ sensors have distinct advantages over conventional sensors. They excel in largest switching distances, maximum flexibility and operational reliability as well as efficient standardization.




## **Inductive sensor** NI50U-CK40-AP6X2-H1141





Distance D	240 mm
Distance W	105 mm
Distance S	60 mm
Distance G	300 mm
Distance N	30 mm

Width of the active face B

40 mm

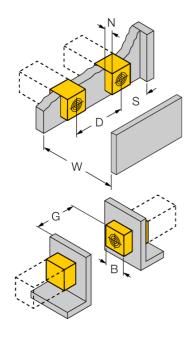

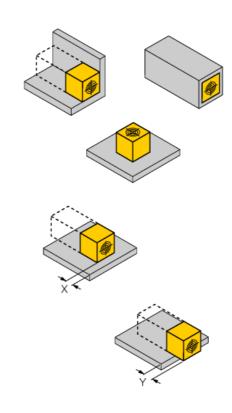



#### Flush mounting

1-side mounting: Sr = 35 mm; D = 240 mm 2-side mounting: Sr = 25 mm; D = 240 mm 3-side mounting: Sr = 20 mm; D = 80 mm 4-side mounting: Sr = 15 mm; D = 60 mm

Backside as well as recessed mounting with reduced switching distance

#### Recessed mounting in metal:

x = 10 mm: Sr = 20 mm x = 20 mm: Sr = 20 mm x = 30 mm: Sr = 20 mm x = 40 mm: Sr = 20 mm

#### Protruded mounting:

y = 10 mm: Sr = 40 mm y = 20 mm: Sr = 50 mm y = 30 mm: Sr = 50 mm y = 40 mm: Sr = 50 mm

Mounting in aperture plate:

T = 150 mm:

Sensor with twisted turning angle

On metal Sr = 50 mm

Metal-enclosed on one side Sr = 25 mm Metal-enclosed on two sides Sr = 15 mm Metal-enclosed on three sides Sr = 12 mm

The values stated relate to a 1 mm thick steel plate.





## **Accessories**

Type code	ldent no.	Description	
BSS-CP40	6901318	Mounting bracket for rectangular devices; material: Polypropylene	70 30 52 58 58

# Wiring accessories

Type code	Ident no.	Description	
RKC4T-2/TEL	6625010	Connection cable, female M12, straight, 3-pin, cable length: 2 m, sheath material: PVC, black; cULus approval; other cable lengths and qualities available, see www.turck.com	